

Reservoir, Series AS5-CLS/ -CLP/ -CLC

- for filters, pre-filters and microfilters
- Material Polycarbonate Die cast zinc
- suitable for ATEX



Type	Reservoir
Certificates	suitable for ATEX
Working pressure min./max.	16 bar
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air
Filter reservoir volume	87 cm ³
Weight	See table below

Technical data

Part No.	Condensate drain	Reservoir
R412009338	semi-automatic, open without pressure	Polycarbonate
R412009339	fully automatic, open without pressure	Polycarbonate
R412009340	fully automatic, closed without pressure	Polycarbonate
R412009344	semi-automatic, open without pressure	Die cast zinc, with window
R412009345	fully automatic, open without pressure	Die cast zinc, with window
R412009346	fully automatic, closed without pressure	Die cast zinc, with window

Part No.	Protective guard	Weight	Fig.
R412009338	Polyamide	0,086 kg	Fig. 1
R412009339	Polyamide	0,116 kg	Fig. 2
R412009340	Polyamide	0,116 kg	Fig. 2
R412009344	-	0,68 kg	Fig. 1
R412009345	-	0,74 kg	Fig. 2
R412009346	-	0,74 kg	Fig. 2


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Reservoir	Polycarbonate Die cast zinc
Protective guard	Polyamide
Seal	Acrylonitrile butadiene rubber

Dimensions

Fig. 2

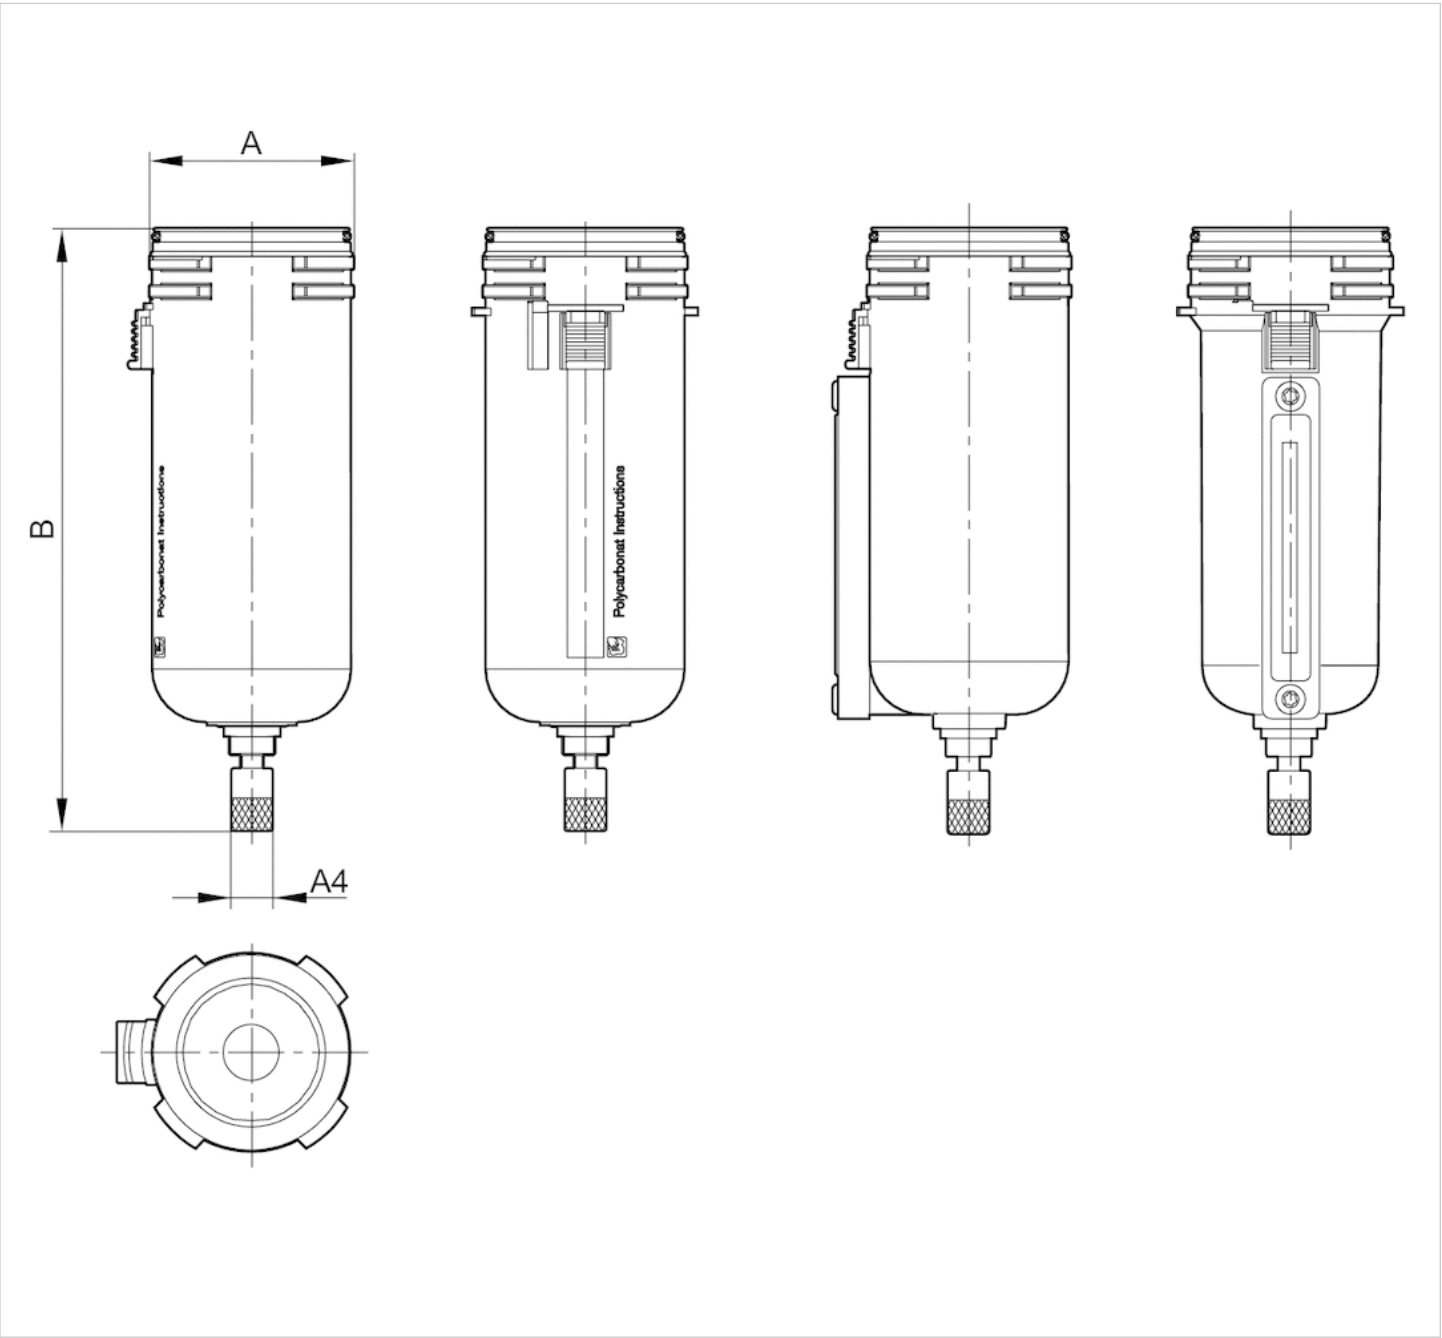

Dimensions

Part No.	A4	A	B
R412009339	G 1/8	60	182
R412009340	G 1/8	60	182
R412009345	G 1/8	60	182
R412009346	G 1/8	60	182