




Technical data

NJ2220C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

Visual(s)

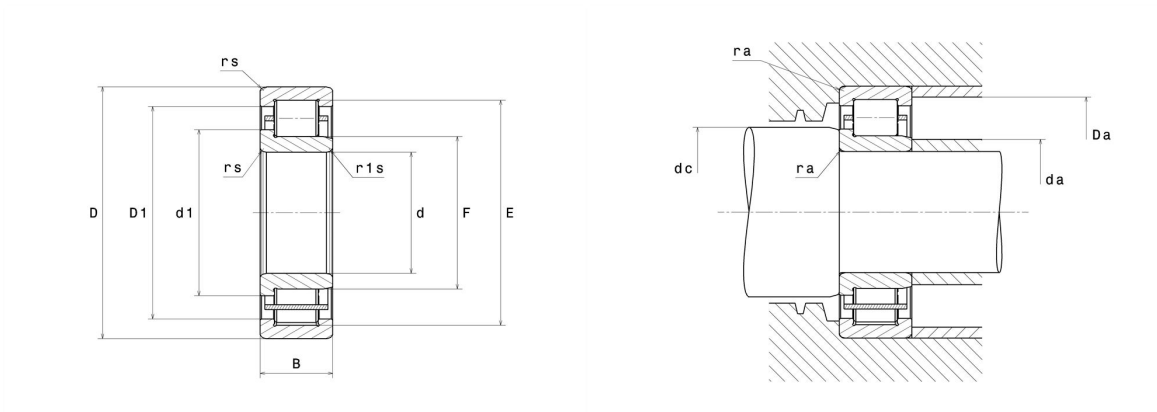

Product definition

d	100 mm
D	180 mm
B	46 mm
E	160 mm
F	120 mm
d1	128 mm
rs min	2.1 mm
r1s min	2.1 mm
Radial clearance class	C3
Mass (without HJ ring)	4.86 kg
Brand	NTN

Product performance

Dynamic load, C	258 kN
Static load, C0	340 kN
Fatigue limit load, Cu	37.5 kN
Nlim (oil)	4,100 Tr/min
Nlim (grease)	3,500 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.86 Hz
Characteristic outer ring frequency, BPF0	6.86 Hz
Characteristic inner ring frequency, BPFI	9.14 Hz

Abutment dimensions

da min	111 mm
da max	117 mm
dc min	130 mm
Da max	169 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$