



C e m b r e
MAKING THE RIGHT CONNECTIONS

RF-M3

0.25mm²-1.5mm² PVC insulated ring terminal M3 stud red




General Information

Material Code	2050030
Weight per Piece	0.58
Weight Unit of Measure	G
Commodity Code (Export Code)	85369010
Country of Origin	IT

Technical

Conductor Size Min (mm²)	0.25
Conductor Size Max (mm²)	1.5
Conductor Type	Copper
Terminal Type	Insulated ring
Palm Type	Straight
Stud Size	M3
Max. Voltage Rating (kV)	0.6
Inspection Hole	N/A
Suitable for Indoor Use? (no exposure to water or moisture)	Yes
Suitable for Outdoor Use? (exposure to water and moisture)	No
Insulated?	Partially
Insulation Material	PVC
Insulation Colour	Red
Halogen Free?	No
Flammability Rating (UL94)	V0
Max. Operating Temperature (°C)	80
Surge Operating Temperature (°C)	90
Min. Operating Temperature (°C)	-20
UL Listed?	Yes
UL Listing File Number	E125401

Datasheet generated from <https://www.electrika.com> last updated Friday, March 1, 2019 4:41:23 PM

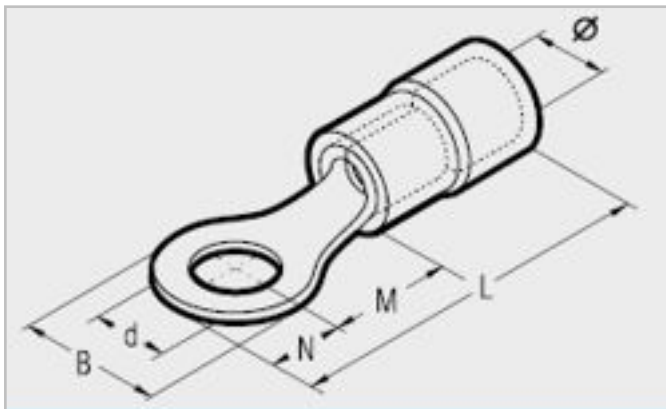

Ø Stud mm	Ref.	Dimensions mm					
		Ø	B	M	N	L	d
2	*RF-M 2*	3,9	5,6	4,5	2,8	17,4	2,2
3	RF-M 3	3,9	5,6	4,5	2,8	17,4	3,2
3,5	RF-M 3.5	3,9	5,6	4,5	2,8	17,4	3,7
3,5	RF-M 3.5/1	3,9	6,2	7,1	3,1	20,3	3,7
4	RF-M 4	3,9	7,0	6,5	3,5	20,1	4,3
4	RF-M 4/3*	3,9	7,8	7,1	3,9	21,1	4,3
5	RF-M 5	3,9	7,8	7,1	3,9	21,1	5,3
6	RF-M 6	3,9	9,4	8,1	4,7	22,9	6,4
6	RF-M 6/1	3,9	12,0	10,3	6,0	26,4	6,4
7	RF-M 7	3,9	9,4	8,1	4,7	22,9	7,2
8	RF-M 8	3,9	12,0	10,3	6,0	26,4	8,4
10	RF-M 10	3,9	15,5	13,0	7,7	30,9	10,5
12	RF-M 12	3,9	18,0	15,5	9,0	34,6	13,0