

Wall mounted socket

Part no. 143PA




- screw terminals
- X-CONTACT®
- with pilot contact

Technical specifications

Ampere	125 A
Poles	5 p
Voltage	400 V
Clock position	6 h
Hertz	50-60 Hz
Connection technology	Screw terminals
Contact	X-CONTACT®
Protection type	IP 67
Weight	2150g

Drawing

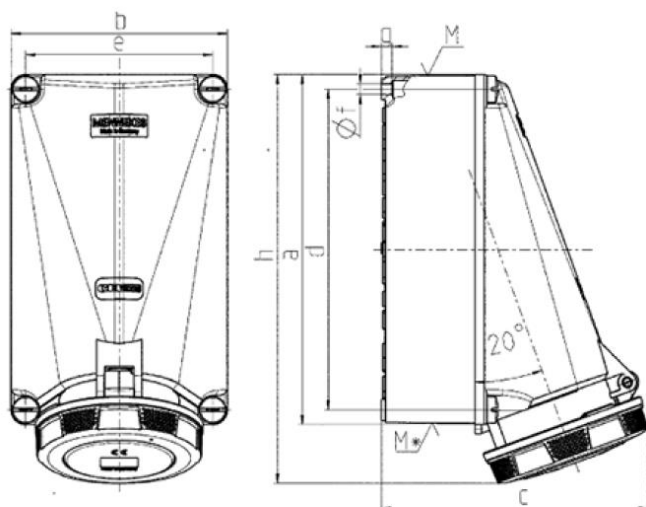

Drawing	Amp. Poles	125 5
Dim. in mm	a	264
	b	163
	c	200
	d	240
	e	140
	f	8.1
	g	8
	h	306
	M	na
	M*	na
Max. cable diam. (mm)		38
Terminal for cond. cross		25
section (mm ²) min.-max.		—35