

Technical Data Sheet

Cogged raw belts


XPA profile

Dimensions

Top width B(mm)	12.7
Height H(mm)	10.0
Angle α (°)	38

Constructions and materials

1	EPDM top rubber
2	High tensile polyester cord
3	EPDM base rubber

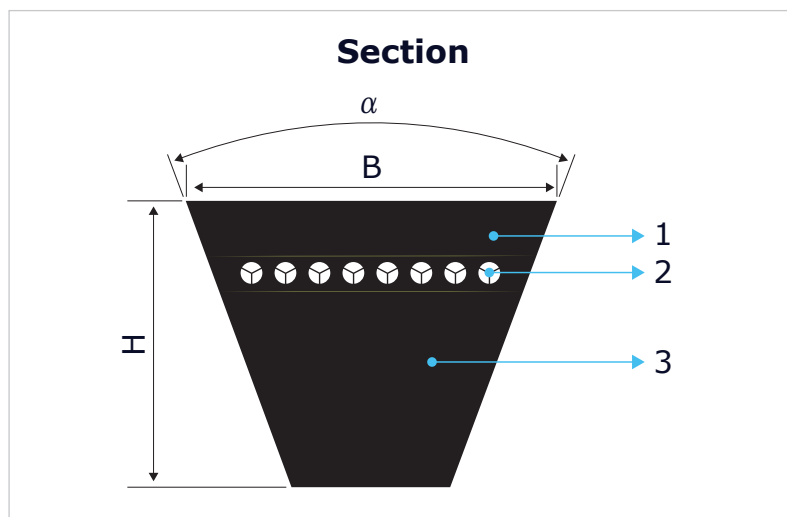

Belt label:

Mecaline

ANTI STATIC

XPA1060

Profile
and length

864529

Rubix
ENG code


4821

Manuf.
Date

Standards: Working Temperature -40 to +120C

- BS 3790 / DIN 7753 PART 1 / ISO 4184
- Anti-static to ISO 1813
- Meets RoHs and REACH requirements
- Length range: 730-4500mm
- Weight: 0.115 kg/m

Length measurement:

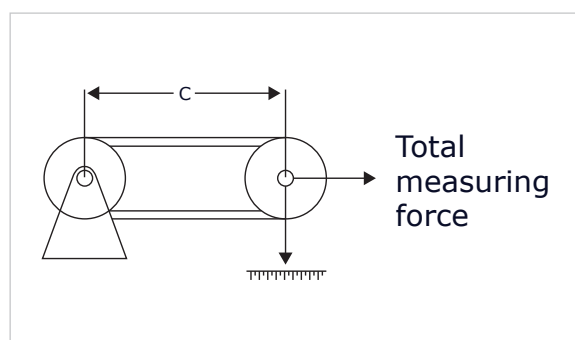

Measuring pulley datum diameter (mm)	143.24
Effective datum circumference (mm)	450
Centre distance (mm)	C
Datum width (mm)	11
Groove angle α (°)	38
Measuring force per belt (N)	560
Belt length: $L_d = 2C + 450$	