




Technical datasheet

NU218ET2XC4

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, polyamide cage

Visual(s)

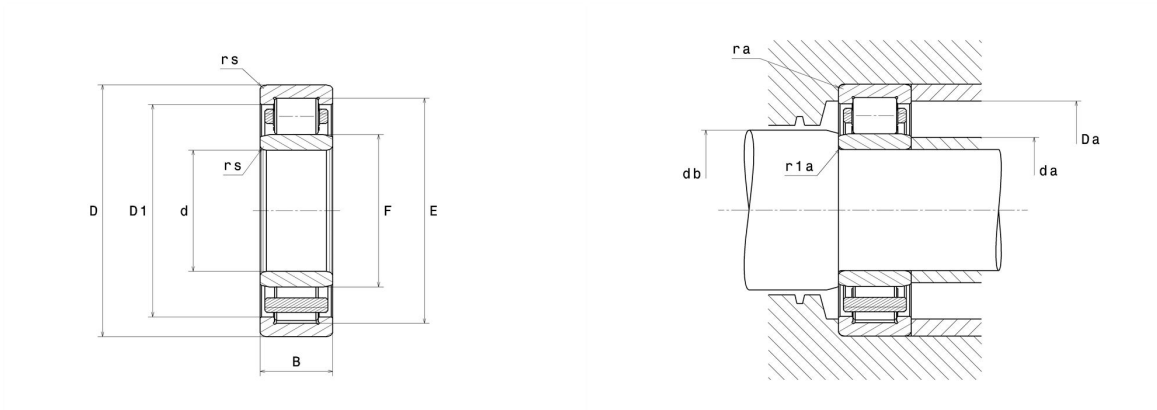

Product definition

d	90 mm
D	160 mm
B	30 mm
E	145 mm
F	107 mm
rs min	2 mm
r1s min	2 mm
Radial clearance class	C4
Mass (without HJ ring)	2.3 kg
Brand	NTN

Product performance

Dynamic load, C	182 kN
Static load, C0	217 kN
Fatigue limit load, Cu	24.7 kN
Nlim (oil)	4,600 rpm
Nlim (grease)	3,900 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.48 Hz
Characteristic outer ring frequency, BPF0	7.22 Hz
Characteristic inner ring frequency, BPF1	9.78 Hz

Abutment dimensions

da min	99 mm
da max	105 mm
db min	109 mm
Da max	151 mm
ra max	2 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$