


Recessed fire-rated Downlight




IP65



3000K

4000K

- Ideal for retro-fit of existing halogen Downlight fixtures
- Dimmable as standard
- Choice of 5 different coloured bezels available
- COB LED source replicates halogen appearance
- Emergency conversion pack also available
- Integral driver, with loop in/out mains connections
- Steel body with fire rated protection (30, 60 & 90 minute certification)
- Supplied in warm white (3000K) or neutral white (4000K)
- Up to 93 lumens per watt efficacy
- 25,000 hours lifetime (L70/B50)

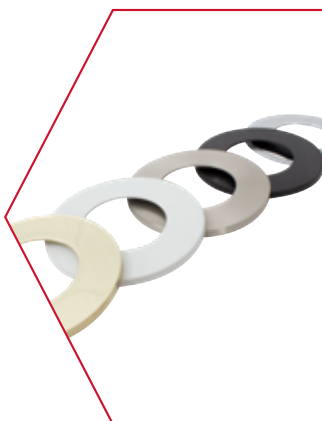

FRD Bezels

Order Code	Description	W	Im	Im/W	Cut out (mm)	Dia. (mm)	C (mm)
XCFRD76WW	7W - 3000K	7	600	86	62	80	85
XCFRD76NW	7W - 4000K	7	650	93	62	80	85

FRD Bezels (See Thumbnail)

Order Code	Description	Dia. (mm)
XCBZBLK	Black - for FRD range	80
XCBZWH	White - for FRD range	80
XCBZSN	Satin nickel - for FRD range	80
XCBZPC	Polished chrome - for FRD range	80
XCBZPB	Polished brass - for FRD range	80



Emergency Conversion Pack

Order Code	Description
XCEM3R	1W Emergency conversion pack

Full list of order codes page 82 - 101

Conversion Plate Available - See Page 32

