


7.2 Tension type take-up housings for split cylindrical roller bearings

d_a 35 – 60 mm

1 3/16 – 2 7/16 in.

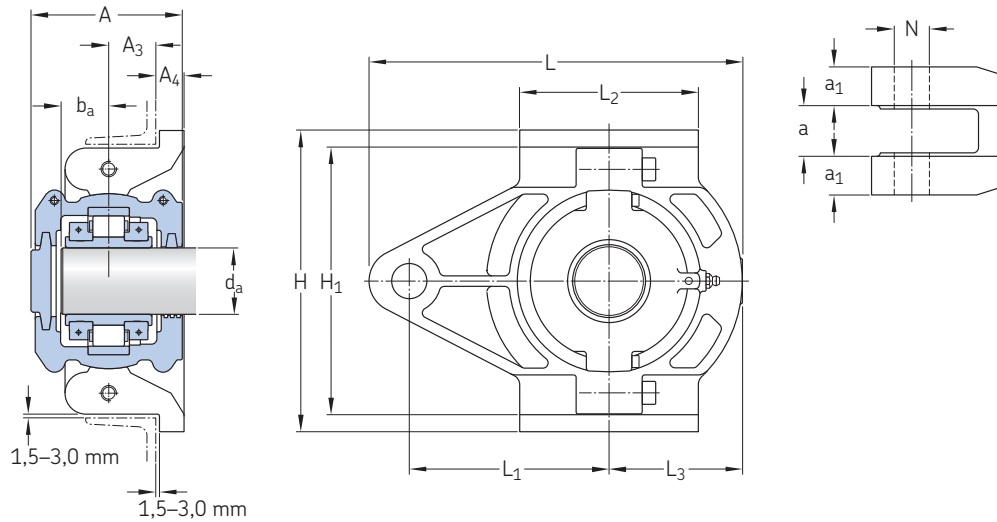

Shaft diameter d _a	Designations ¹⁾		Cartridge with felt seals	Cartridge for labyrinth seals	Dimensions														Mass Hous- ing
	Housing	Bearing			A	A ₃	A ₄	a	a ₁	b _a	H	H ₁	L	L ₁	L ₂	L ₃	N		
mm/in.	—				mm														kg
1 3/16	TT01	01EB103GR	—	01C1GR	86	29	14	25	24	27	172	153	216	114	102	76	20	7	
1 1/4	TT01	01EB104GR	—	01C1GR	86	29	14	25	24	27	172	153	216	114	102	76	20	7	
35	TT01	01EB35MGR	—	01C1GR	86	29	14	25	24	27	172	153	216	114	102	76	20	7	
1 7/16	TT01	01EB107GR	—	01C1GR	86	29	14	25	24	27	172	153	216	114	102	76	20	7	
1 1/2	TT01	01EB108GR	01C108GR	01C1GR	86	29	14	25	24	27	172	153	216	114	102	76	20	7	
40	TT01	01EB40MGR	01C40MGR	01C1GR	86	29	14	25	24	27	172	153	216	114	102	76	20	7	
1 11/16	TT02	01EB111GR	01C111GR	01C2GR	98	29	16	25	25	29	204	178	242	128	114	88	24	10	
1 3/4	TT02	01EB112GR	01C112GR	01C2GR	98	29	16	25	25	29	204	178	242	128	114	88	24	10	
45	TT02	01EB45MGR	01C45MGR	01C2GR	98	29	16	25	25	29	204	178	242	128	114	88	24	10	
1 15/16	TT02	01EB115GR	01C115GR	01C2GR	98	29	16	25	25	29	204	178	242	128	114	88	24	10	
	TT03	02EB115GR	02C115GR	02C3GR	114	32	20	30	29	35	235	203	280	146	128	102	24	13	
50	TT02	01EB50MGR	01C50MGR	01C2GR	98	29	16	25	25	29	204	178	242	128	114	88	24	10	
	TT03	02EB50MGR	02C50MGR	02C3GR	114	32	20	30	29	35	235	203	280	146	128	102	24	13	
2	TT02	01EB200GR	01C200GR	01C2GR	98	29	16	25	25	29	204	178	242	128	114	88	24	10	
	TT03	02EB200GR	02C200GR	02C3GR	114	32	20	30	29	35	235	203	280	146	128	102	24	13	
55	TT03	01EB55MGR	01C55MGR	01C3GR	104	32	20	30	29	30	235	203	280	146	128	102	24	13	
2 3/16	TT03	01EB203GR	01C203GR	01C3GR	104	32	20	30	29	30	235	203	280	146	128	102	24	13	
	TT04	02EB203GR	02C03GR	02C4GR	126	40	22	30	32	38	266	229	305	158	152	114	24	19	
2 1/4	TT03	01EB204GR	01C204GR	01C3GR	104	32	20	30	29	30	235	203	280	146	128	102	24	13	
	TT04	02EB204GR	02C204GR	02C4GR	126	40	22	30	32	38	266	229	305	158	152	114	24	19	
60	TT03	01EB60MGR	01C60MGR	01C3GR	104	32	20	30	29	30	235	203	280	146	128	102	24	13	
	TT04	02EB60MGR	02C60MGR	02C4GR	126	40	22	30	32	38	266	229	305	158	152	114	24	19	
2 7/16	TT03	01EB207GR	01C207GR	01C3GR	104	32	20	30	29	30	235	203	280	146	128	102	24	13	
	TT04	02EB207GR	02C207GR	02CC4GR	126	40	22	30	32	38	266	229	305	158	152	114	24	19	

¹⁾ The designation suffix GR refers to bearings in the locating position. Other bearing options and alternative seals are available on request. For additional information, refer to *Designations* on page 186.