


Technical datasheet


NUKR80X/3AS

Cam follower with shaft

Needle roller bearing, cam follower, full-complement cylindrical roller, slot for screwdriver, oil hole, double-side shields, cylindrical outer ring



Visual(s)

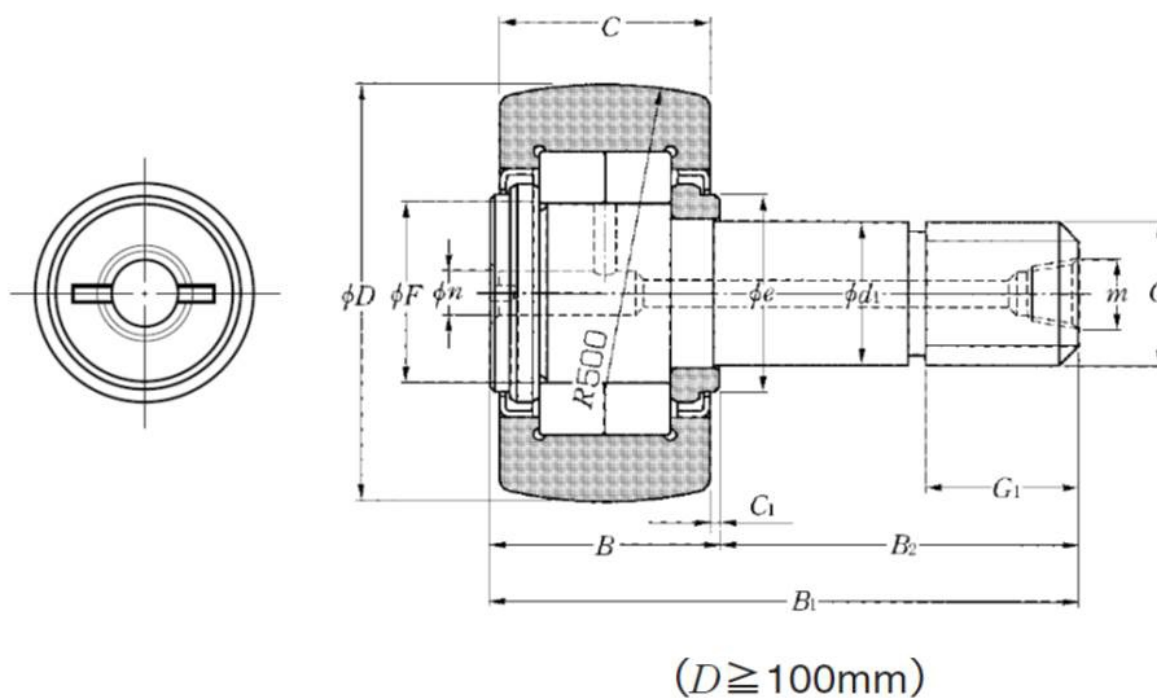

Product definition

D	80 mm
d1	30 mm
C	35 mm
F	47.5 mm
B	37 mm
B1	100 mm
B2	63 mm
G	M30X1.5
G1	32 mm
B3	15 mm
C1	1 mm
n	8 mm
a	4 mm
e	51 mm
Dw	7.5 mm
Lw	13 mm
Maximum tightening torque	360 Nm
Bearing with/without cage	Sans
Radial clearance class	CN
Precision class	P0
Mass	1.54 kg
Brand	NTN

Product performance

Cr	101 kN
C0r	151 kN
Track load capacity cylindrical outer ring	53 kN
Nlim (grease)	2,100 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.2 Hz
Characteristic outer ring frequency, BPF0	9.93 Hz
Characteristic inner ring frequency, BPFI	13.07 Hz