

C VQ0000/1000 Kit (Connector)

- Standard with lead wires plug-connected to each valve individually.
- Maximum stations are 16.

VV5Q05


VV5Q12

Manifold Specifications

Series	Port location	Porting specifications		Applicable stations
		1(P), 3(R)	4(A), 2(B)	
VQ0000	Side	C6	C3, C4, M5	Max. 16
VQ1000	Side	C8	C3, C4, C6, M5	Max.16 stations

Wiring specifications: Positive COM ●

- The lead wires are connected to the valve as shown below. Connect each to the power supply side.

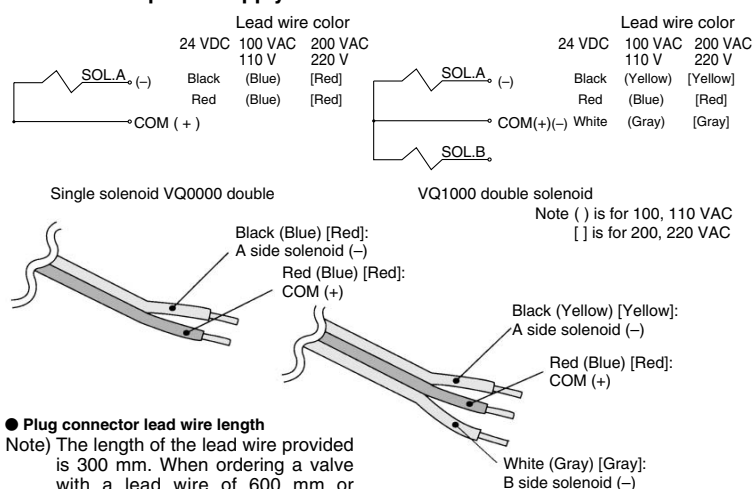

● Plug connector lead wire length

Note) The length of the lead wire provided is 300 mm. When ordering a valve with a lead wire of 600 mm or longer, be sure to indicate the model number of the valve without connector and connector assembly.

Example) Lead wire length 1000 mm
VQ1110-5LO..... 3 pcs.
AXT661-14A-10 3 pcs.

Connector Assembly (For DC)


Lead wire length	Part no. for single & VQ0000 double	Part no. for VQ1000 double
Socket (3 pcs.)	AXT661-12A	
300 mm	AXT661-14A	AXT661-13A
600 mm	AXT661-14A-6	AXT661-13A-6
1000 mm	AXT661-14A-10	AXT661-13A-10
2000 mm	AXT661-14A-20	AXT661-13A-20
3000 mm	AXT661-14A-30	AXT661-13A-30

Note) 100/110 VAC for single: AXT661-31A-□; for double: AXT661-32A-□
200/220 VAC for single: AXT661-34A-□; for double: AXT661-35A-□

VV5Q05

VV5Q12

How to Order Manifold

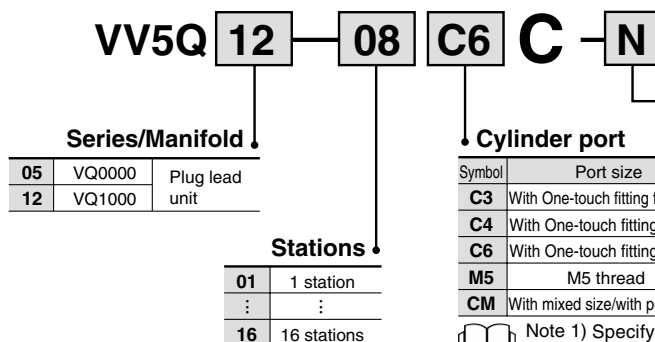

Note 1) Specify "Mixed size/with port plug" on the manifold specification sheet.
Note 2) For One-touch fittings in inch sizes, refer to "Option" on page 2-4-216.

Option

Symbol	Option	VQ0000	VQ1000
Nil	None	●	—
B	With back pressure check valve	—	● (2)
D	DIN rail mounting style	●	● (3)
N	With name plate	●	●
S	Built-in silencer, direct exhaust	●	●

Note 1) When two or more symbols are specified, indicate them alphabetically. Example) -BNS

Note 2) Models with a suffix "-B" have the back pressure check valve at all manifold stations. If not all stations need this check valve, specify the stations where check valves are installed by using the manifold specification sheet.

Note 3) VQ1000 are all equipped with a DIN rail, so indicate suffix "-D".