

DOOR MAGNETS

FEATURES

- EN1155 compliant
- Strong holding force
- Low current consumption
- Robust design
- Adjustable keeper plate
- Integrated release button

SPECIFICATION

- Operating voltage ~ 24V DC (FSDH24)
- 230V AC (FSDH240)
- Operating temperature ~ 0°C to + 30°C
- Rated holding force ~ 200N
- Residual holding force ~ zero
- Coloured white



DOOR MAGNET


Order code	Description	Nominal current (mA)	Wgt (kg)
FSDH24	24V DC door magnet	50	0.46
FDDH240	230V AC door magnet	12	0.46

DOOR MAGNET ACCESSORIES

- FSDHB3 Floor mounting bracket

DIMENSIONS (MM)

Part	A	B	C
MAGNET ENCLOSURE	80	80	56
KEEPER PLATE	70	70	40

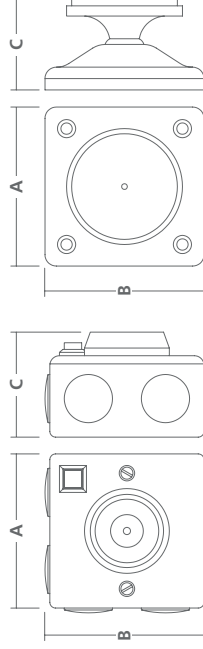


ANCILLARIES

FEATURES

- Indication of hidden active detectors
- For use in roof voids, lift shafts etc.

SPECIFICATION

- Operating voltage ~ 5 - 24V DC
- Operating temperature ~ -10°C to + 40°C
- Maximum current ~ 24mA
- ABS flame retardant
- IP42

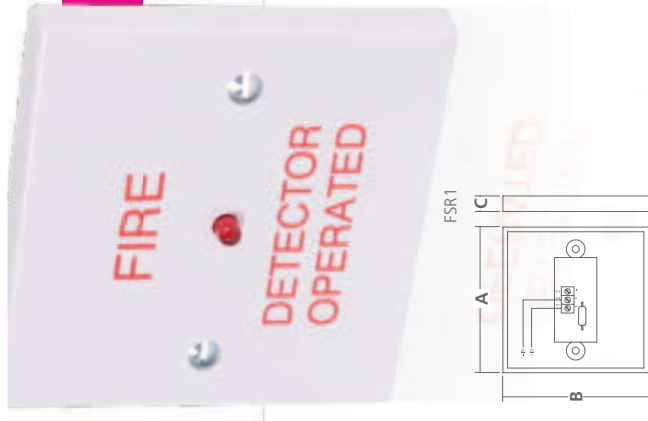

REMOTE INDICATOR UNIT

Order Code	Description	Wgt (kg)	Dimensions (mm)		
FSR1	Remote indicator unit	0.04	A	B	C
			86	86	12


FEATURES

- Essential for local mains power isolation
- Mains neon indication
- Surface mount
- 20mm knockouts
- Supplied with 13A fuse



SPECIFICATION

- Operating voltage ~ 230V AC
- Operating temperature ~ -10°C to + 40°C
- Maximum current ~ 13A
- Metal enclosure
- Coloured red
- IP21

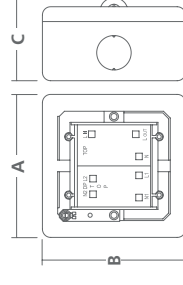

MAINS ISOLATOR SWITCH

Order Code	Description	Wgt (kg)	Dimensions (mm)		
FSRPE5142	Mains Isolator switch	0.26	A	B	C
			87	87	45