


Technical datasheet

KR26C

Cam follower with shaft

Needle roller bearing, cam follower, with cage, slot for screwdriver, oil hole, spherical outer ring

Visual(s)

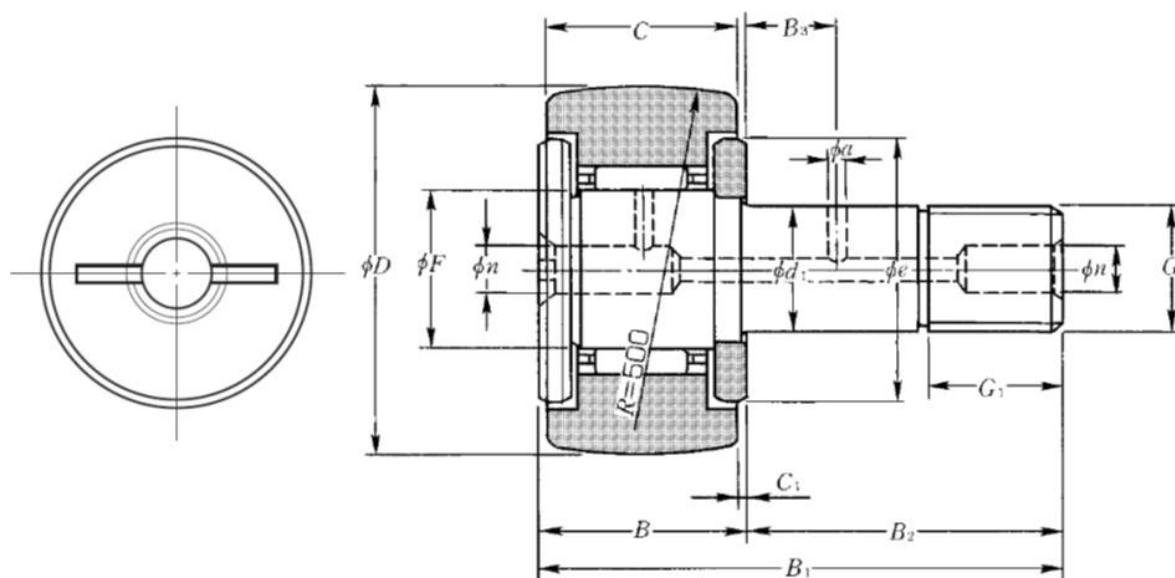

Product definition	
D	26 mm
d1	10 mm
C	12 mm
F	12 mm
B	13 mm
B1	36 mm
B2	23 mm
G	M10X1
G1	12 mm
C1	0.6 mm
n	4 mm
e	17 mm
R	500 mm
Dw	1.5 mm
Lw	6.3 mm
Maximum tightening torque	14 Nm
Bearing with/without cage	Avec
Radial clearance class	CN
Precision class	P0
Mass	0.06 kg
Brand	NTN

Product performance	
Cr	5.3 kN
C0r	6.65 kN
Track load capacity spherical outer ring	2.12 kN
Nlim (grease)	12,000 rpm
Nlim (oil)	16,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.89 Hz
Characteristic outer ring frequency, BPF0	8 Hz
Characteristic inner ring frequency, BPFI	10 Hz