

Technical Data Sheet

Cogged raw belts


XPC profile

Dimensions

Top width B(mm)	22
Height H(mm)	18
Angle α (°)	38

Constructions and materials

1	EPDM top rubber
2	High tensile polyester cord
3	EPDM base rubber

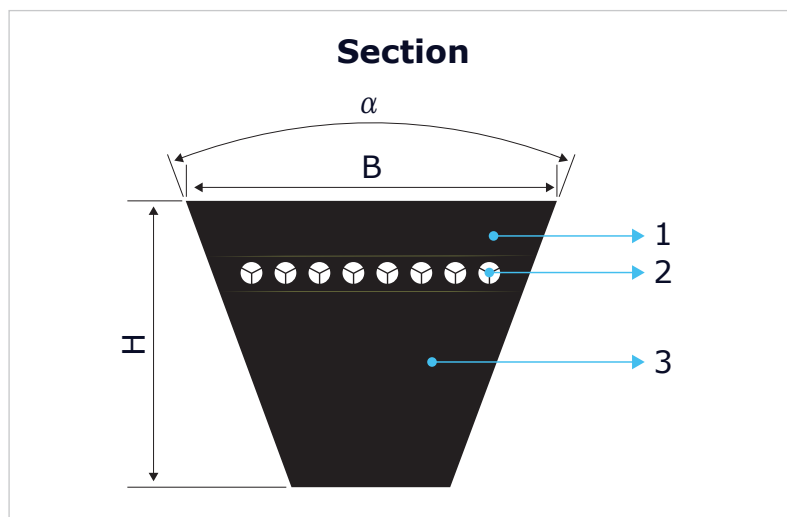

Belt label:

Mecaline

ANTI STATIC

XPC3350

Profile
and length

873636

Rubix
ENG code


4821

Manuf.
Date

Standards: Working temperature -40 to +120C

- BS 3790 / DIN 7753 PART 1 / ISO 4184
- Anti-static to ISO 1813
- Meets RoHs and REACH requirements
- Length range: 2240-5000mm
- Weight: 0.335 kg/m

Length measurement:

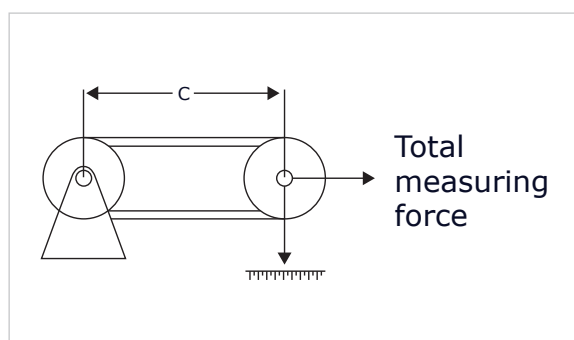

Measuring pulley datum diameter (mm)	318.31
Effective datum circumference (mm)	1000
Centre distance (mm)	C
Datum width (mm)	19
Groove angle α (°)	38
Measuring force per belt (N)	1500
Belt length: $L_d = 2C + 1000$	