




Technical datasheet

NU2230

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

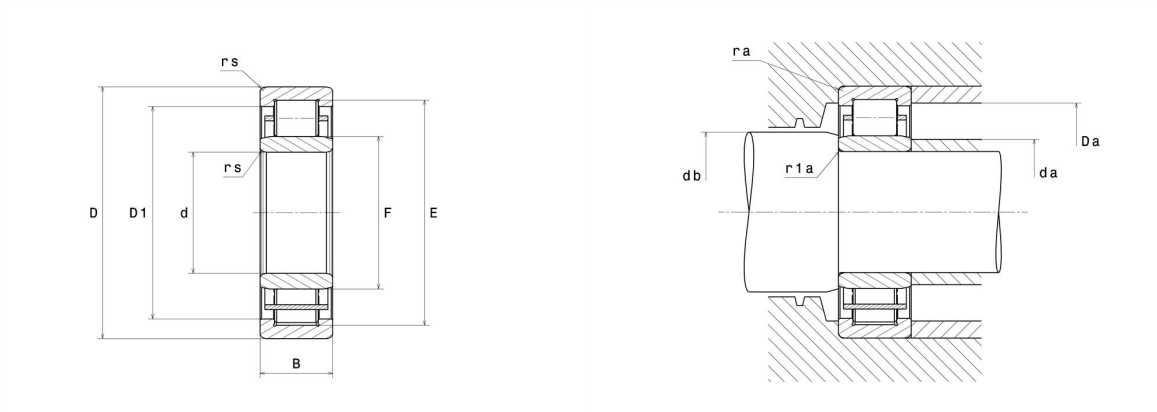

Product definition

d	150 mm
D	270 mm
B	73 mm
E	238 mm
F	182 mm
rs min	3 mm
r1s min	3 mm
Radial clearance class	CN
Mass (without HJ ring)	16.7 kg
Brand	NTN

Product performance

Dynamic load, C	500 kN
Static load, C0	710 kN
Fatigue limit load, Cu	69.3 kN
Nlim (oil)	2,600 rpm
Nlim (grease)	2,200 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	163 mm
da max	179 mm
db min	184 mm
Da max	257 mm
ra max	2.5 mm
r1a max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$