



Technical data

UCP213


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC213G2, P213

VISUAL (S)

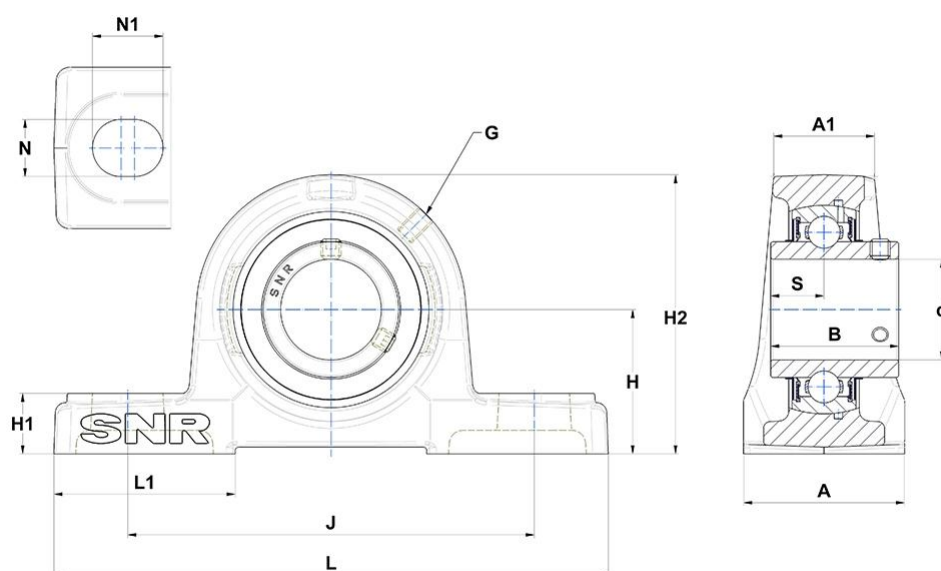

PRODUCT DEFINITION

Brand	SNR
A - Housing width	70 mm
A1 - Housing top width	46 mm
B - Width of Inner Ring	65,1 mm
d - Shaft diameter	65 mm
G - Grease fitting	M6x1

PRODUCT DEFINITION

H - Distance mounting base to centerline spheric. seating diam.	76,2 mm
H1 - Housing foot height	27 mm
H2 - Housing height	150 mm
J - Mounting holes distance	203 mm
L - Housing length	265 mm
L1 - Housing foot length	77 mm
N - Mounting hole dimension	25 mm
N1 - Mounting hole length	29 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	25,4 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	57,2 kN
C0 - Static load rating	40 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	6,06 kg
Recommended tightening torque for set screw	33 N-m