


Flat suction gripper, Series FSR

- F = 16-2560 N
- external diameter 30-300 mm
- Internal thread



Ambient temperature min./max.	-10 ... 70 °C
Hardness according to standard	60 ± 5 Shore A
Abrasion value according to DIN 535 16	105 mm ³
Weight	See table below

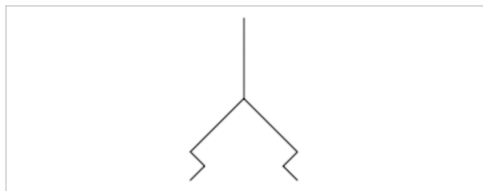

Technical data


Part No.	Compressed air connection	external diameter	Holding force	Volume	Max. curving on object Rmin
			*)		
7320300000	M5	30 mm	16 N	2.5 cm ³	50 mm
7320500000	G 1/8	50 mm	64 N	8 cm ³	110 mm
7320750000	G 1/4	75 mm	160 N	28 cm ³	165 mm
7321000000	G 3/8	100 mm	304 N	56 cm ³	165 mm
7321500000	G 1/2	150 mm	608 N	160 cm ³	306 mm
7322250000	G 3/4	225 mm	1480 N	500 cm ³	465 mm
7323000000	G 1	300 mm	2560 N	1250 cm ³	758 mm

Part No.	Weight
7320300000	0.01 kg
7320500000	0.02 kg
7320750000	0.03 kg
7321000000	0.07 kg
7321500000	0.21 kg
7322250000	0.75 kg
7323000000	1.8 kg

*) Theoretical value at 60% vacuum level, without safety factor

Dimensions

Dimensions

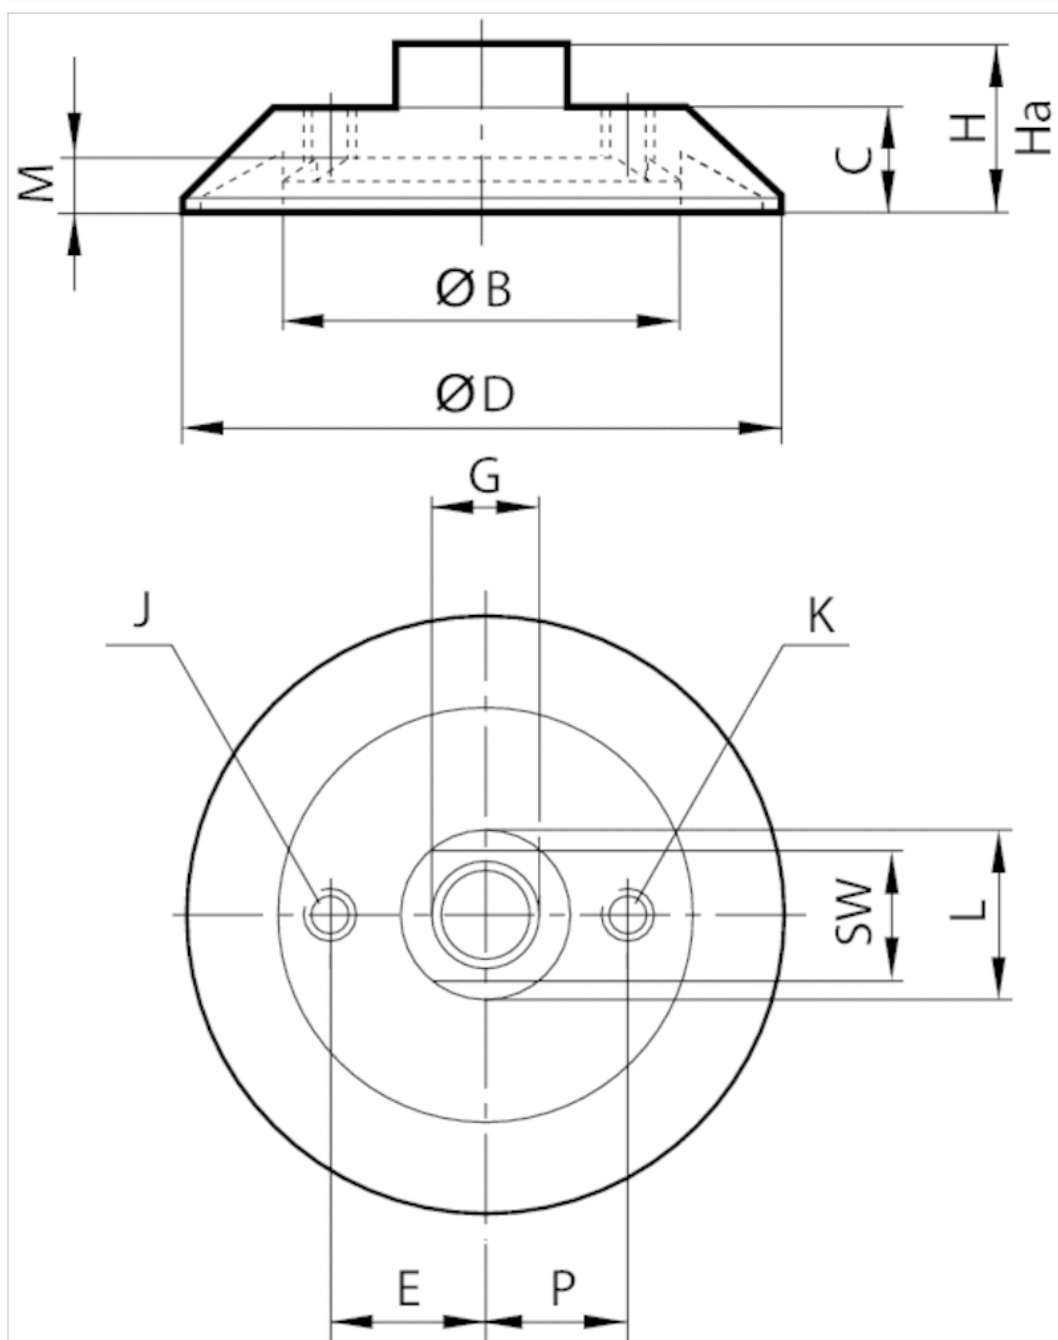

Dimensions

Part No.	$\varnothing D$	G	$\varnothing B$	C	E	H	Ha*)	J	K	L	M	P	SW
7320300000	30 mm	M5	13	10	–	17	14.5	–	–	10	3.5	–	8
7320500000	50 mm	G 1/8	31	11	–	18	13.5	–	–	18	5.5	–	14
7320750000	75 mm	G 1/4	49	14	–	22	16.5	–	–	22	7	–	17
7321000000	100 mm	G 3/8	65.5	18	–	28	21	–	G 1/8	24	8.5	20	21
7321500000	150 mm	G 1/2	96	26	–	42	33	–	G 1/8	35	12	30	27
7322250000	225 mm	G 3/4	149	34	–	54	43	–	G 1/8	50	14	50	41
7323000000	300 mm	G 1	200	44	70	70	55	G 1/2	G 1/8	56	19	60	46