

Technical Data Sheet

Cogged raw belts


XPZ profile

Dimensions

Top width B(mm)	10
Height H(mm)	8.5
Angle α (°)	38

Constructions and materials

1	EPDM top rubber
2	High tensile polyester cord
3	EPDM base rubber

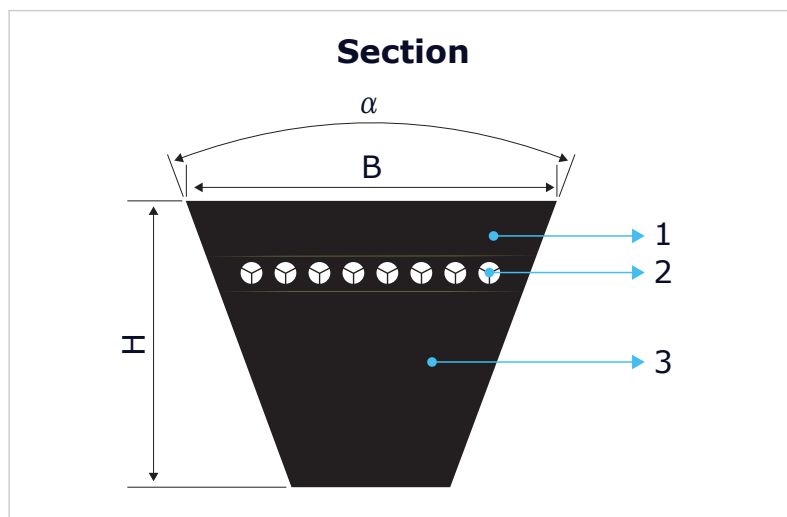

Belt label:

Mecaline

ANTI STATIC

XPZ1320

Profile
and length

864485

Rubix
ENG code

4821


Manuf.
Date

Standards:

Working temperature -40 to +120C

- BS 3790 / DIN 7753 PART 1 / ISO 4184
- Anti-static to ISO 1813
- Meets RoHs and REACH requirements
- Length range:612-3550mm
- Weight:0.065 kg/m

Length measurement:

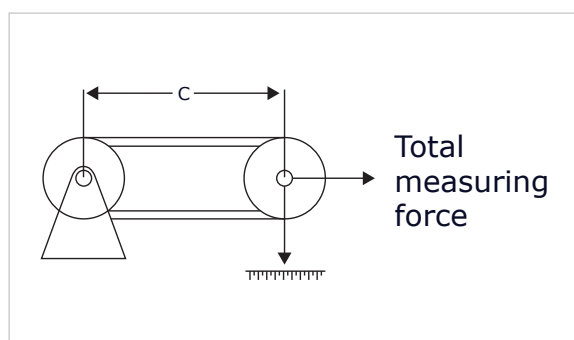

Measuring pulley datum diameter (mm)	95.49
Effective datum circumference (mm)	300
Centre distance (mm)	C
Datum width (mm)	8.94
Groove angle α (°)	38
Measuring force per belt (N)	360

Belt length: $L_d = 2C + 300$