



Ø
16.5
25
40



MALE STUD FITTING - BSP TAPER


Transair®	ØD	C	Hex	E	ØG	L	Kg
6605 17 13	16.5	R1/4	20	9.5	34	62,5	0.100
6605 17 21	16.5	R1/2	24	12	34	65	0.110
6605 25 21	25	R1/2	30	15	44.5	70	0.166
6605 25 27	25	R3/4	30	16	44.5	71	0.176
6605 25 34	25	R1"	38	16	44.5	71	0.230
6605 40 34	40	R1"	41	16	67	111	0.585
6605 40 42	40	R1"1/4	41	19.5	67	111	0.510
6605 40 49	40	R1"1/2	50	24.5	67	115	0.625

Ø
50
63



Transair®	ØD	C	Hex	E	ØG	L	Kg
6605 50 49	50	R1"1/2	65	22.9	80	121	0.567
6605 50 48	50	R2"	65	27.2	80	125	0.587
6605 63 48	63	R2"	80	27.2	91	123	0.587
6605 63 47	63	R2"1/2	80	30.5	91	127	0.605


Ø
25
40
50

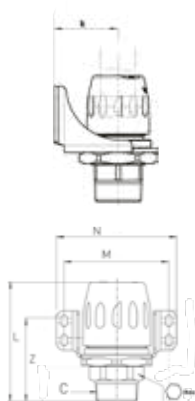

MALE STUD FITTING WITH FIXING PLATE - BSP TAPER

Transair®	ØD	C	Hex	k	L	M	N	Z	Kg
6615 25 21	25	R1/2	27	46	87	87	102	60	0.465
6615 25 27	25	R3/4	27	46	87	87	102	60	0.485
6615 25 34	25	R1"	34	46	91	87	102	64	0.575
6615 40 42	40	R1"1/4	50	46	121	105	120	75	0.993
6615 40 49	40	R1"1/2	50	46	121	105	120	75	1.106
6615 50 49	50	R1"1/2	65	90	127	117	132	72	0.642
6615 50 48	50	R2"	65	90	131	117	132	73	0.719

Ø
16.5
25
40
50
63



MALE THREADED NUT - BSP TAPER

Transair®	ØD	C	Hex	L	Kg
6611 17 21	16.5	R1/2	23	41	0.150
6611 25 21	25	R1/2	27	43	0.172
6611 25 27	25	R3/4	27	45	0.210
6611 25 34	25	R1"	36	49	0.250
6611 40 34	40	R1"	41	53	0.410
6611 40 42	40	R1"1/4	50	61	0.480
6611 40 49	40	R1"1/2	50	61	0.500
6611 40 48	40	R2"	60	65	0.620
6611 50 49	50	R1"1/2	65	79	0.237
6611 50 48	50	R2"	65	85	0.295
6611 63 48	63	R2"	80	83	0.359
6611 63 47	63	R2"1/2	80	87	0.372

6611 male threaded stud fittings can be used with all Transair® pipe-to-pipe stud connectors (as a replacement for the standard nuts) for Ø16.5 to Ø63mm.