



U.S. Tsubaki Power Transmission, LLC

301 E. Marquardt Dr.

Wheeling, IL 60090

Phone: 847.459.9500 or 800.323.7790


Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com

ITEM # BSEU40-35, BSEU40-35 MM BORE CAM CLUTCH

BSEU Series Cam Clutch was developed as a user-friendly backstopping Cam Clutch. It has cam and roller construction which is the same as the smaller size BS Series Cam Clutch. The outer race has a special shape which combines the torque arm providing easy installation. These Cam Clutches are shipped pre-lubricated with grease and ready for installation. Most often used as a backstop in applications where limited space is available.

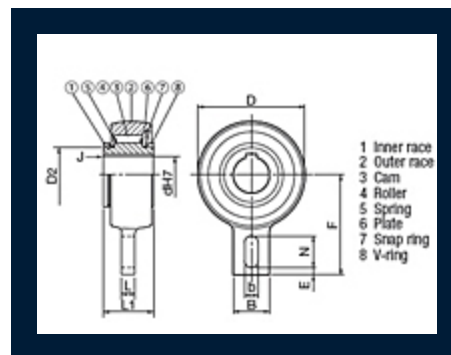

Specifications

Torque Capacity	1062.0 lb·ft 1440.0 N·m
Max. Overrunning Speed	450 rpm
Bore Size	1.378 in 35.00 mm
Inner Race Keyway	10 x 3.3 mm

D (Diameter)	4.646 in 118.00 mm
D2	2.362 in 60.00 mm
L1 (Overall Width)	2.165 in 55.00 mm
L (Width)	0.591 in 15.00 mm
B (Tab Width)	1.575 in 40.00 mm
F (End to Center-Line)	4.331 in 110.00 mm
b (Slot Width)	0.591 in 15.00 mm
N (Slot Height)	1.378 in 35.00 mm
E	0.315 in 8.00 mm
J (Chamfer)	0.059 in 1.50 mm
Weight (Approx.)	8.360 lb 3.800 kg