


PILLOW BLOCK ASSEMBLY COMPONENTS AND DIMENSIONS

FOR SHAFT DIAMETERS 20 TO 40 MM, 3/4" TO 1 1/2"

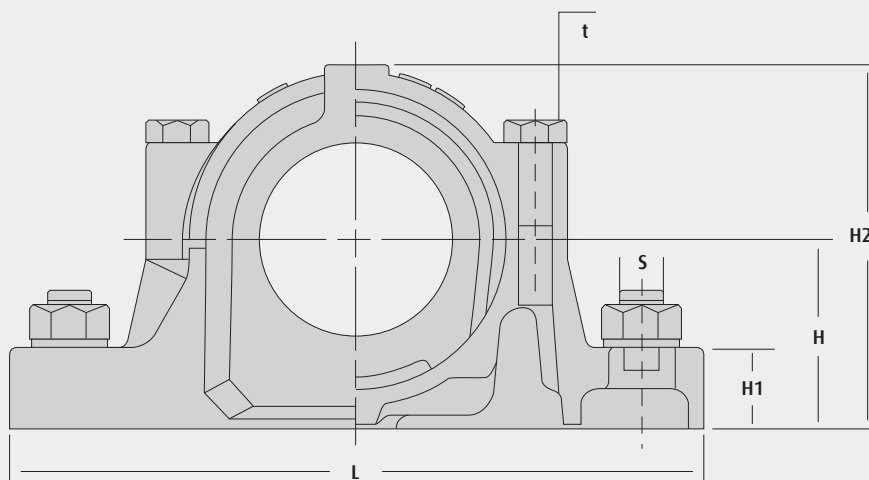

SHAFT DIAMETER			PILLOW BLOCK ASSEMBLY COMPONENTS													
mm	in1	in2	Pillow Block	Basic Bearing		Adapter Sleeve			Seal Options			Fixing Ring		Endcover	Weight (kg)	
				ball	roller	metric	in1	in2	G-LOK	V-RING	TS-RING		qty		ball	roller
20	3/4		SNN505	1205K		H205		HE205	G505	V505	TS505 ²	FR52X5	2	A505	2.3	
				2205K	22205K	H305		HE305				FR52X5	1		2.3	2.3
			SNN506-605	1305K	21305K	H305		HE305	G605	V605	TS605 ²	FR62X7.5	2	A506	2.3	2.3
				2305K		H2305						FR62X8	1		2.4	
25	15/16	1	SNN506-605	1206K		H206	HA206	HE206	G506	V506	TS506 ¹	FR62X8	2	A506	2.3	
				2206K	22206K	H306	HA306	HE306				FR62X12	1		2.4	2.4
			SNN507-606	1306K	21306K	H306	HA306	HE306	G606	V606	TS606 ^{1,2}	FR72X7.5	2	A507	2.7	2.7
				2306K		H2306	HA2306	HE2306				FR72X7	1		2.8	
30	1.3/16		SNN507-606	1207K		H207	HA207		G507	V507	TS507 ¹	FR72X8.5	2	A507	2.7	
				2207K	22207K	H307	HA307					FR72X11	1		2.7	2.8
			SNN508-607	1307K	21307K	H307	HA307		G607	V607	TS607 ¹	FR80X9	2	A508	3.6	3.6
				2307K		H2307	HA2307					FR80X8	1		3.7	
35	1.1/4		SNN508-607	1208K		H208		HE208	G508 ²	V508 ²	TS508 ²	FR80X10.5	2	A508	3.6	
				2208K	22208K	H308		HE308				FR80X8	2		3.6	3.7
			SNN510-608	1308K	21308K	H308		HE308	G608 ²	V608 ²	TS608 ²	FR90X9	2	A510	4.1	4.1
				2308K	22308K	H2308		HE2308				FR90X8	1		4.2	4.4
40	1.7/16	1.1/2	SNN509	1209K		H209	HA209	HE209	G509 ¹	V509 ¹	TS509 ^{1,2}	FR85X5.5	2	A509	3.7	
				2209K	22209K	H309	HA309	HE309				FR85X7	1		3.8	3.9
			SNN511-609	1309K	21309K	H309	HA309	HE309	G609 ¹	V609 ¹	TS609 ^{1,2}	FR100X9.5	2	A511	6.1	6.1
				2309K	22309K	H2309	HA2309	HE2309				FR100X8	1		6.3	6.5

¹ add suffix A for shaft diameter "in1"
² add suffix E for shaft diameter "in2"