



Mains & car charger included



VECORCFL20
Perfect for
use in attics



VECORCFL10
Excellent for
use in fuse box
cupboards




EternaEco
LED
3 YEAR
Warranty*



VECORCFL10



VECORCFL20

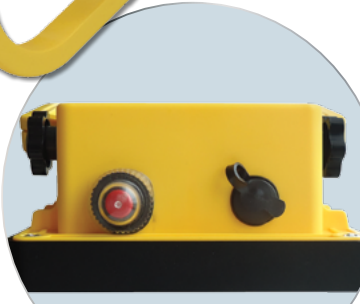

ENERGY

A++
A+
A
B
C
D
E

A+

VECORCFL10
10 kWh / 1000h

VECORCFL20
20 kWh / 1000h

ECONOMY RECHARGEABLE FLOODLIGHT

- ABS housing • Safety glass cover
 - 10W: 2 x 18650 Li-ion battery - 3.7V, capacity 2200mAh
 - 20W: 4 x 18650 Li-ion battery - 7.4V, capacity 4400mAh
 - 4 hours illumination (with full charge)
 - Charge times from full discharge are as follows:
6 hours (mains charger) / 6 hours (car charger)
 - IP44: enables internal and external use
 - Comes complete with mains charger and car charger
- M.O.M: 1 / O.P.Q: 20

Code	Colour	Wattage	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP Rating	UK Rating
VECORCFL10	Yellow	10W	4000K	650 lm	30,000 hrs	IP44	A+
VECORCFL20		20W		1300 lm			

LED LAMP SPECIFICATIONS:	10W	20W
Luminaire lumens (with diffuser)	650 lm	1300 lm
Lumens from chip (no diffuser)	900 lm	1400 lm
Useful lumens	600 lm	1300 lm
Rated Wattage	10W	20W
Rated luminous flux	600 lm	1300 lm
Nominal life time of the lamp	30,000 hrs	30,000 hrs
Colour temperature	4000K	4000K
Number of switching cycles before premature lamp failure	15,000	15,000
Warm-up time up to 60% of the full light output	<1s	<1s
Dimmable	No	No
Nominal beam angle	120°	120°
Rated power	10W	20W
Rated lamp lifetime	30,000 hrs	30,000 hrs
Lamp power factor	>0.5	>0.5
Lumen maintenance factor at end of nominal life	≥0.7	≥0.7
Starting time	<0.5s	<0.5s
Colour rendering	70	70
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	207cd	413cd
Rated beam angle	120°	120°
Voltage / Frequency	3.7V DC	7.4V DC

Not suitable for accent lighting

*Subject to terms & conditions