


Technical data

BK4020

Drawn cup needle roller bearings, closed end

Needle roller bearing, drawn cup, closed end

Visual(s)

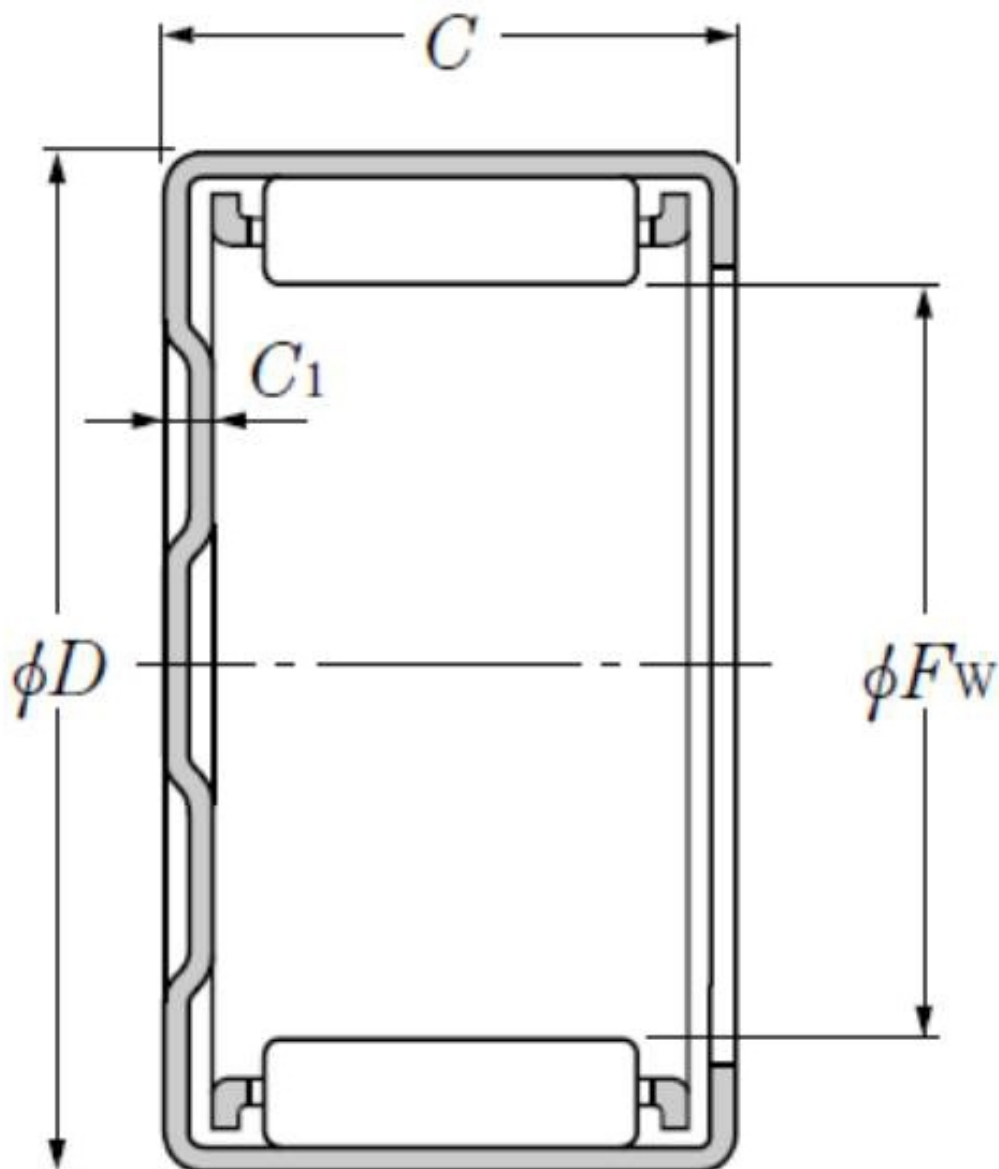

Product definition	
Fw	40 mm
D	47 mm
C	20 mm
C1	2.7 mm
Dw	2.5 mm
Lw	15.3 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	IR35X40X20.5
Mass	0.06 kg

Product performance	
Cr	25.9 kN
C0r	52.5 kN
Nlim (grease)	4,000 Tr/min
Nlim (oil)	6,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.47 Hz
Characteristic rolling element frequency, BSF	16.94 Hz
Characteristic outer ring frequency, BPF0	16 Hz
Characteristic inner ring frequency, BPF1	18 Hz