

Technical data

UCPA207-20L3CC


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, triple lip seal

KIT CONTENT

UC207-20G2L3, SCC207, SCOU207-20, SCOU207-20, SCC207, PA207N

VISUAL (S)

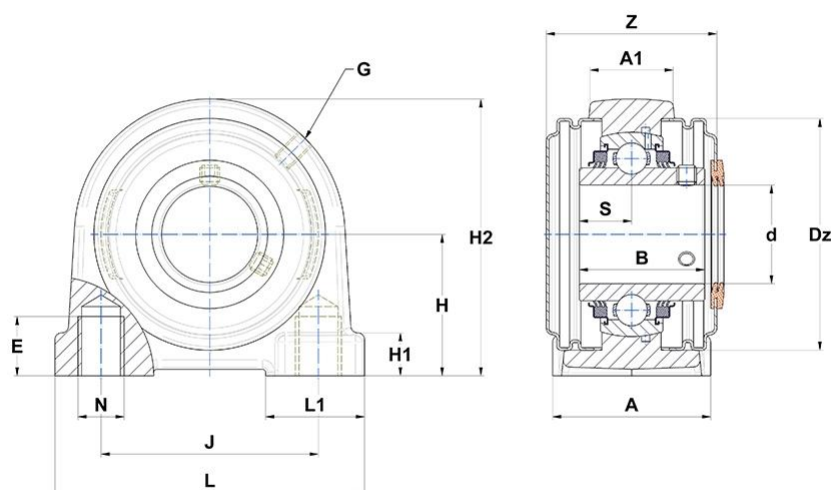

PRODUCT DIMENSIONS

A - Housing width	48 mm
A1 - Housing top width	27 mm
B - Width of Inner Ring	42,9 mm
d - Shaft diameter	31,75 mm
Dz - Outer diameter of cover	80 mm
E - Mounting hole thread depth	20 mm

PRODUCT DIMENSIONS

G - Grease fitting	M6x1
H - Distance mounting base to centerline spheric. seating diam.	47,6 mm
H1 - Housing foot height	13 mm
H2 - Housing height	95 mm
J - Mounting holes distance	80 mm
L - Housing length	110 mm
L1 - Housing foot length	30 mm
N - Mounting hole dimension	M14
S - Dist. cent. of raceway to face IR on side opp. lock. device	17,5 mm
Width over covers	60 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,649 kg
Recommended tightening torque for set screw	8 N-m