

Technical data

UCPA207T20


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, labyrinth seal, for high-temp. applications

KIT CONTENT

UC207G2T20, PA207

VISUAL (S)

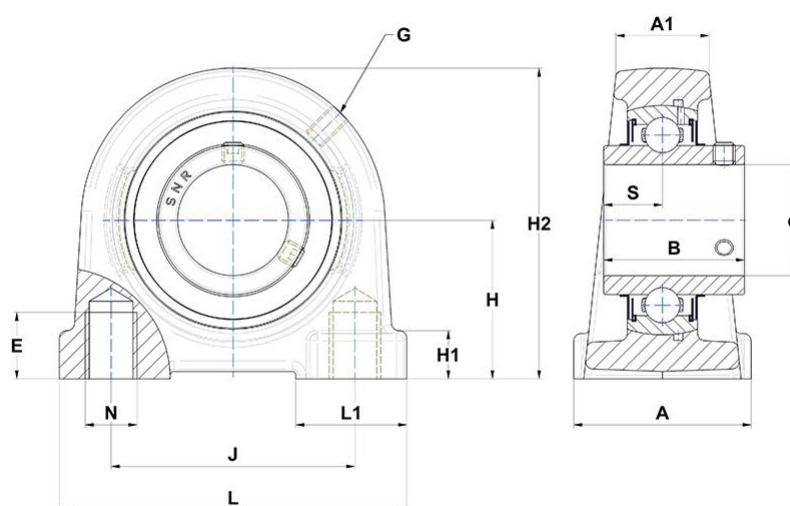

PRODUCT DEFINITION

Brand	SNR
A - Housing width	48 mm
A1 - Housing top width	27 mm
B - Width of Inner Ring	42,9 mm
d - Shaft diameter	35 mm

PRODUCT DEFINITION

E - Mounting hole thread depth	20 mm
G - Grease fitting	M6x1
H - Distance mounting base to centerline spheric. seating diam.	47,6 mm
H1 - Housing foot height	13 mm
H2 - Housing height	95 mm
J - Mounting holes distance	80 mm
L - Housing length	110 mm
L1 - Housing foot length	30 mm
N - Mounting hole dimension	M14
S - Distance front side/bearing centre	17,5 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	200 °C

OTHER FEATURES

Mass	1,47 kg
Recommended tightening torque for set screw	11.5 N-m