

Reducing nipple

- External thread
- G 1/8 G 1/4 G 3/8 G 1/2 G 3/4 G 1
- M5 G 1/8 G 1/4 G 3/8 G 1/2 G 3/4
- FPT-S-RDZ



Working pressure min./max.

0 ... 60 bar

Ambient temperature min./max.

-20 ... 70 °C

Technical data


Part No.	Port G	Port D	Delivery unit	Material
1823391080	G 1/8	M5	10 piece	Brass
1823391012	G 1/4	G 1/8	10 piece	-
1823391298	G 3/8	G 1/8	10 piece	Brass
1823391013	G 3/8	G 1/4	10 piece	Brass
1823391299	G 1/2	G 1/8	5 piece	Brass
1823391300	G 1/2	G 1/4	5 piece	Brass
1823391014	G 1/2	G 3/8	5 piece	Brass
1823391301	G 3/4	G 1/4	5 piece	Brass
1823391302	G 3/4	G 3/8	5 piece	Brass
1823391028	G 3/4	G 1/2	5 piece	Brass
1823391303	G 1	G 3/8	2 piece	Brass
1823391304	G 1	G 1/2	2 piece	Brass
1823391285	G 1	G 3/4	2 piece	Brass

Technical information

Material	
Material	Brass, nickel-plated
Seal	Polyvinyl chloride, hard

Dimensions

Dimensions

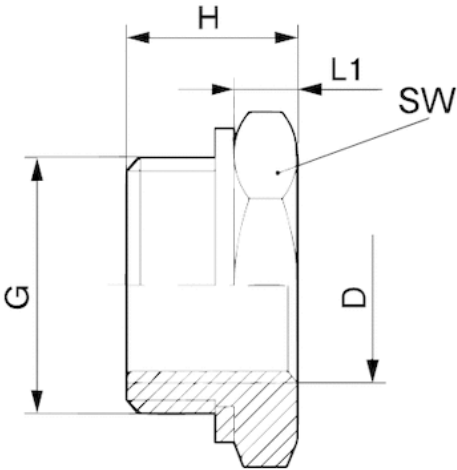

Dimensions

Part No.	Port D	Port G	H	L1	SW
1823391080	M5	G 1/8	10.5	4.5	14
1823391012	G 1/8	G 1/4	13	4	17
1823391298	G 1/8	G 3/8	14	5	19
1823391013	G 1/4	G 3/8	15	5	19
1823391299	G 1/8	G 1/2	15.5	5.5	24
1823391300	G 1/4	G 1/2	15.5	5.5	24
1823391014	G 3/8	G 1/2	15.5	5.5	24
1823391301	G 1/4	G 3/4	19	7	32

Part No.	Port D	Port G	H	L1	SW
1823391302	G 3/8	G 3/4	19	7	32
1823391028	G 1/2	G 3/4	19	7	32
1823391303	G 3/8	G 1	23	8	41
1823391304	G 1/2	G 1	23	8	41
1823391285	G 3/4	G 1	23	8	41