


## Wall mounted socket

Part no. 5692PO

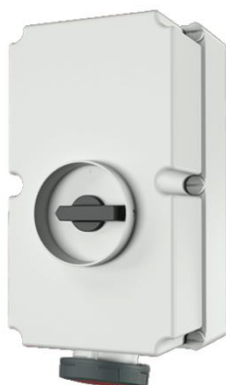


- screw terminals
- switched
- mechanical DUO-interlock
- with *Pilot Contact*
- X-CONTACT®
- for 125 A DUO-sockets 15384000 is required to install a padlock

## Technical specifications

|                       |                 |
|-----------------------|-----------------|
| Ampere                | 125 A           |
| Poles                 | 5 p             |
| Voltage               | 400 V           |
| Clock position        | 6 h             |
| Hertz                 | 50-60 Hz        |
| Connection technology | Screw terminals |
| Contact               | standard        |
| Protection type       | IP 67           |
| Weight                | 8600 g          |

## Drawing

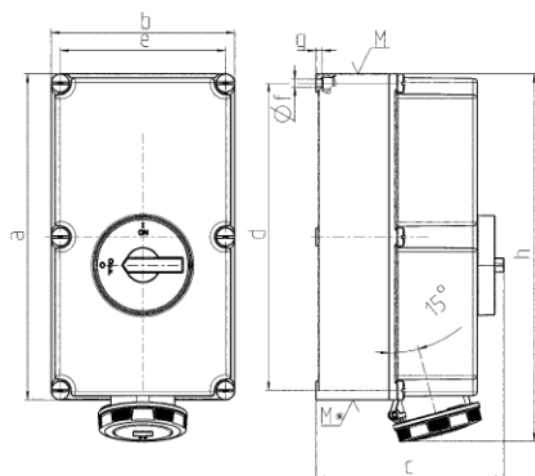

| Drawing                              | Amp.  | 125  |      |      |
|--------------------------------------|-------|------|------|------|
| 1 MB 177                             | Poles | 3    | 4    | 5    |
| Dim. in mm                           | a     | 460  | 460  | 460  |
|                                      | b     | 260  | 260  | 260  |
|                                      | c     | 270  | 270  | 270  |
|                                      | d     | 434  | 434  | 434  |
|                                      | e     | 234  | 234  | 234  |
|                                      | f     | 11   | 11   | 11   |
|                                      | g     | 9    | 9    | 9    |
|                                      | h     | 519  | 519  | 519  |
|                                      | M     | 63   | 63   | 63   |
|                                      | M*    | 2x63 | 2x63 | 2x63 |
| Max. cable diam. (mm)                |       | 44   | 44   | 44   |
| Terminal for cond. cross             |       | 25   | 25   | 25   |
| section (mm <sup>2</sup> ) min.-max. |       | —70  | —70  | —70  |