


Series EX510

System Composition / Options

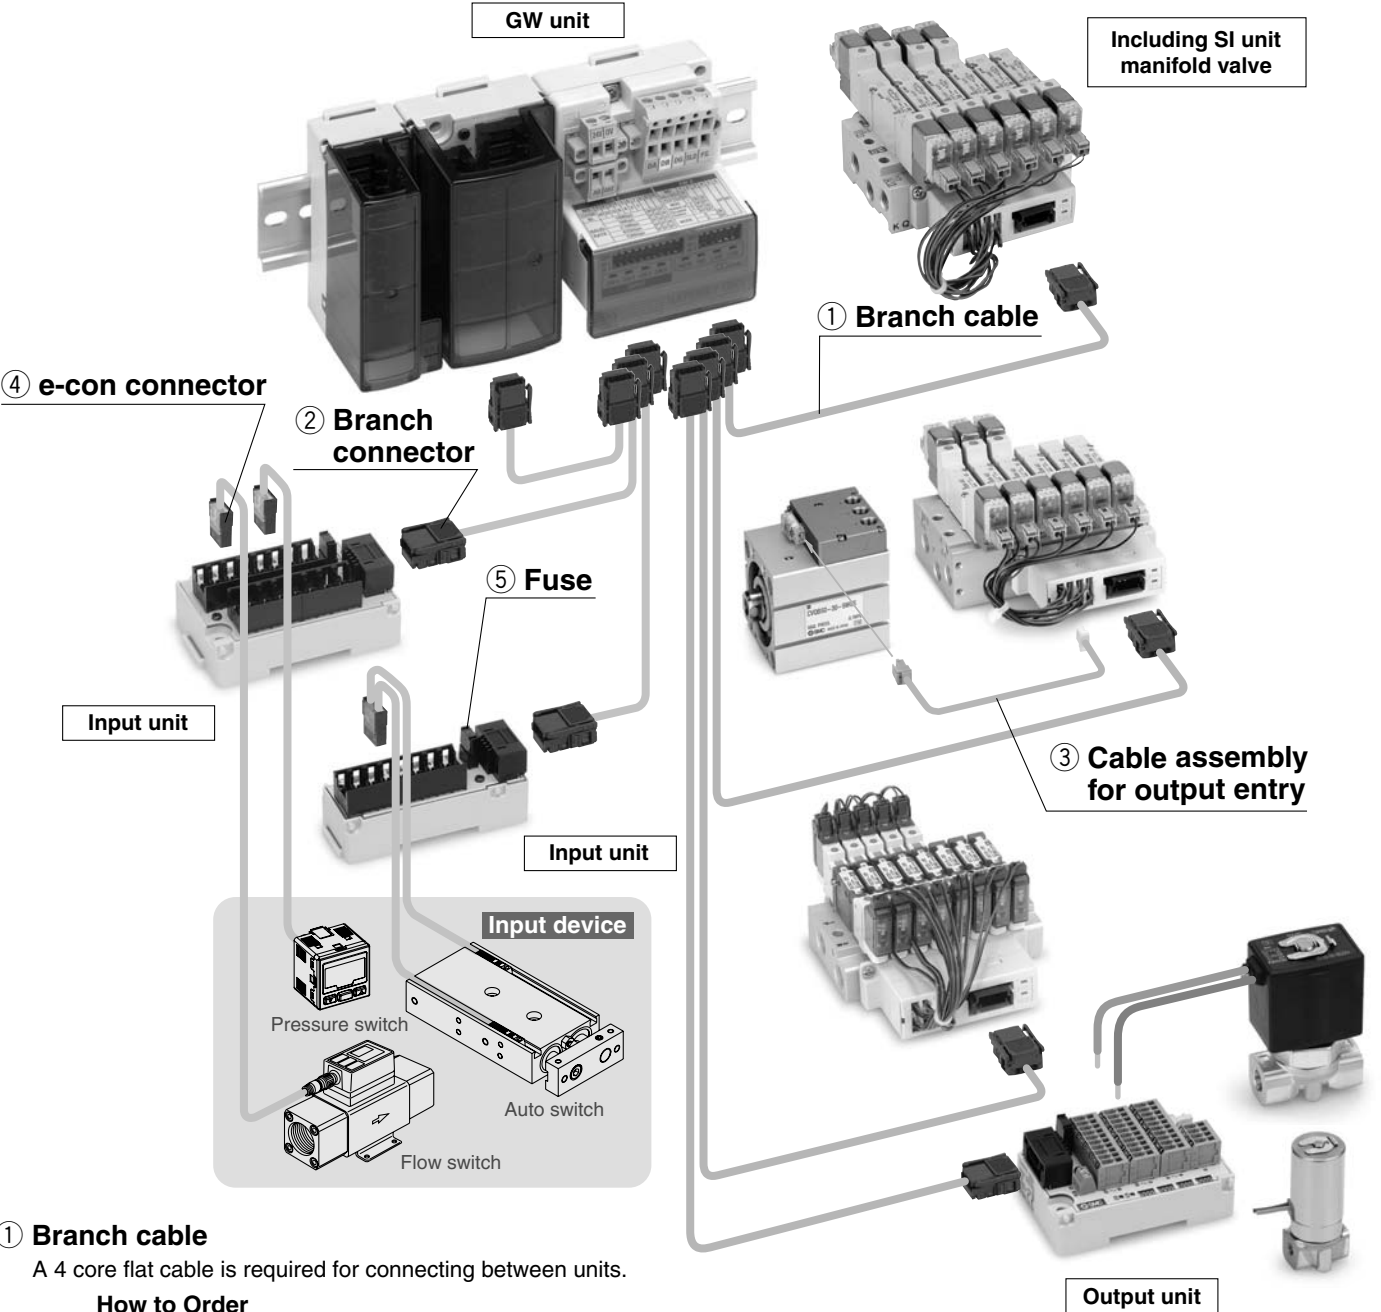


- ① **Branch cable**
A 4 core flat cable is required for connecting between units.

How to Order
EX510-FC 10


Cable length (L)	
01	1 m
02	2 m
05	5 m
10	10 m
20	20 m
60 (Note)	60 m

Note) Branch cable length is a maximum of 20 m. Use the cable by cutting it into lengths of 20 m or shorter.

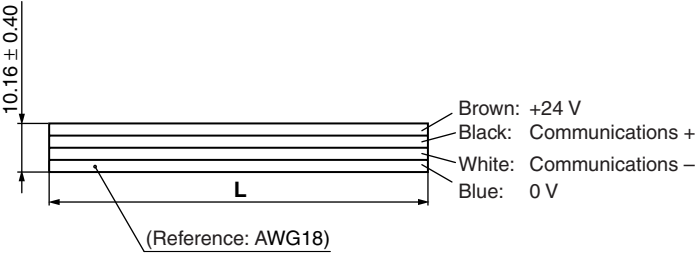

- ② **Branch connector (Unit 1 pc.)**
Connector required for connecting a branch cable to each unit.
Two branch cables are attached to the SI unit, the input unit and the output unit respectively.

How to Order
EX510-LC1



(When press-fitting)

Electrical specifications	
Rated voltage	24 VDC
Rated current	Max. 5.0 A
Contact resistance	20 mΩ or less
Withstand voltage	1000 VAC 1 minute (Leak current 1 mA or less)