

Lathe – HU 430x1000 VAC Topline ...



Description

The lathes of the TOPLINE series are equipped with inverters and have 3 SKF bearings. This results in very high accuracy, long life-span, high stability and a high work load. These lathes have an external brake resistor which makes deceleration of the main axis safe and quick.

Features

- meehanite bed hardened and ground
- apron with overload protection
- coolant system
- chuck brake
- large chuck opening
- leadscrew runs in oil bath, nuts of phosphor bronze
- DIN 8606

	HU 430x1000 VAC Topline	HU 430x1500 VAC Topline
	Item no. 30670	Item no. 30626
Distance between centres	1000 mm	1500 mm
Loose head head	MT4	MT4
Dimensions l x b x h	2150 x 810 x 1190 mm	2650 x 810 x 1190 mm
Taper of main spindle	MT6, CAMLOCK DI-8	MT6, CAMLOCK DI-8
Brand	Huvema Machine tools	Huvema Machine tools

General specifications

- ✓ Swing over bed: 430 mm
- ✓ Swing over cross slide: 240 mm
- ✓ Cross travel support: 245 mm
- ✓ Width of bed: 300 mm
- ✓ Tailstock spindle travel: 150 mm
- ✓ Tailstock diameter: 80 mm
- ✓ Hole through spindle: 80 mm
- ✓ Threading metric: P 0,5 – P 7 mm
- ✓ Center height: 215 mm
- ✓ Swing in gap: 650 mm
- ✓ Longitudinal feed: 0,05 – 0,82 mm
- ✓ Threading inch: 4 – 56 TPI
- ✓ Leadscrew diameter: 35 mm
- ✓ Cross feed range: 0,02 – 0,4 mm
- ✓ Spindle speed values: 40 – 2000 rpm
- ✓ Coolant pump: 0,1 kW
- ✓ Power of main engine: 7,5 kW
- ✓ Net weight: 2050 kg
- ✓ Voltage: 400 V

Accessory optional



Set with quick change base holder and toolholders
SWBH SET C 20121004



Live centers
MDC MK4 20121082





Huvema set 2-Axis
Newall DRO-2 322900



Keyless drill chuck
DC 1016-B16-ECO 20112240



Drill chuck arbor with MT shank
MTB 4 ADAPT B16 20112265

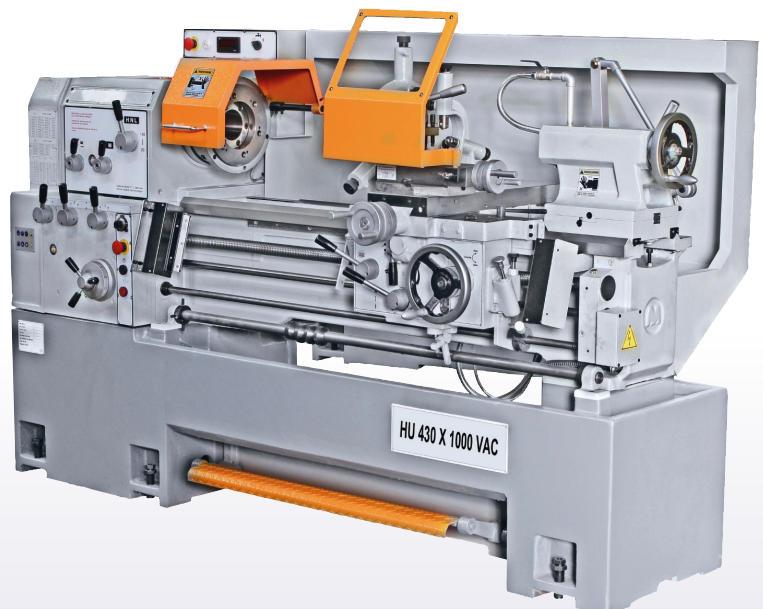

Website HU 430x1000 VAC Topline