



Technical data

UCFL208CC


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger. In the figure, flanged bearing units are presented with open cover. The product you have chosen is equipped with closed cover.

KIT CONTENT

UC208G2, SCC208, FL208N

VISUAL (S)

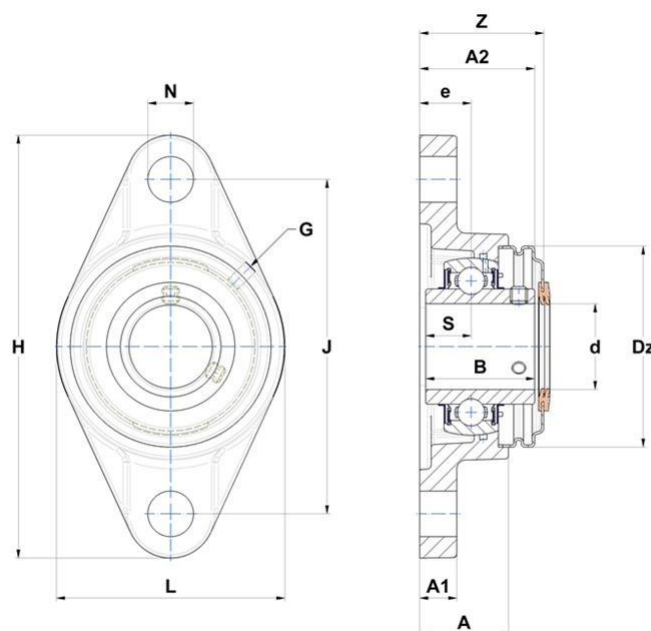

PRODUCT DEFINITION

A - Housing height	36 mm
A1 - Housing foot height / flange height	14 mm
A2 - Total height from mounting surface	51,2 mm
B - Width of Inner Ring	49,2 mm
d - Shaft diameter	40 mm

PRODUCT DEFINITION

Dz - Outer diameter of cover	88 mm
e - Distance mounting surface to bearing center	21 mm
G - Grease fitting	M6x1
H - Housing length, width or diameter	175 mm
J - Mounting holes distance	144 mm
L - Housing width / diameter	100 mm
N - Mounting hole dimension	16 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	19 mm
Z - Width over covers	55,7 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	29,6 kN
C0 - Static load rating	18,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,538 kg
Recommended tightening torque for set screw	11.5 N-m