




Technical datasheet

ET-33013

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Visual(s)

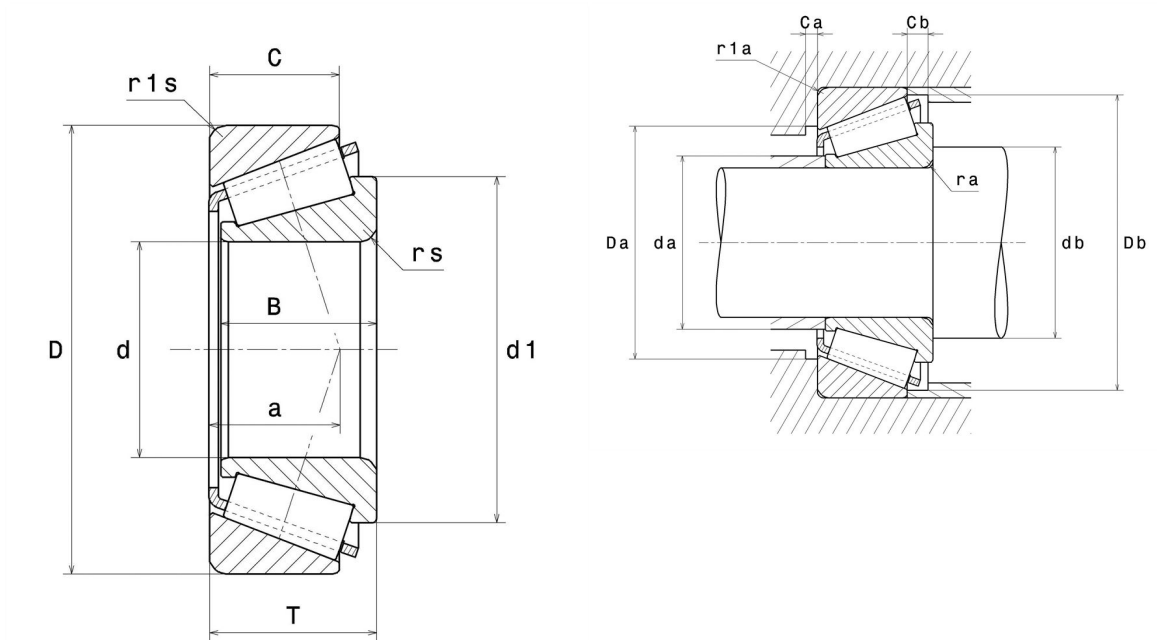

Product definition

d	65 mm
D	100 mm
B	27 mm
C	21 mm
T	27 mm
d1	83 mm
a	21.5 mm
rs min	1.5 mm
r1s min	1.5 mm
e	0.35
Y2	1.72
Y0	0.95
Mass	0.73 kg
ISO 355 reference	T2CE065
Brand	NTN

Product performance

Dynamic load, C	97.5 kN
Rating life coefficient, A2	1.9
Static load, C0	156 kN
Fatigue limit load, Cu	19 kN
Nlim (oil)	4,600 rpm
Nlim (grease)	3,400 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	10.06 Hz
Characteristic outer ring frequency, BPF0	12.66 Hz
Characteristic inner ring frequency, BPFI	15.34 Hz

Abutment dimensions

da max	72 mm
db min	73.5 mm
Da min	89 mm
Da max	91.5 mm
Db min	96 mm
Ca min	5 mm
Cb min	6 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y ₂

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y ₀

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y₂ and Y₀ are shown in the above table