

### Compact and light

Dimensions: Approx. **30%** down  
\* Comparison with KQBL06-01S

Weight: Approx. **62%** down  
\* Comparison with KQBL06-01S

### More tube sizes added

Ø3.2 (Ø1.8") and Ø16 have been added.

### More configuration variations

**17** models ◀ **9** models

### Inch size x UNF/NPT thread, Metric size x G thread added

### Applicable tube size

Ø3.2 to Ø16, Ø1/8" to Ø1/2"

### Connection thread: M, R, Rc, UNF, NPT, G

### Fluid temperature: -5 to 150°C

### Grease-free

**NEW**  
KQB2L06-01S

**15.9 mm**

Weight  
**10.2 g**

Conventional model

KQBL06-01S


**22.1 mm**

Weight  
**27 g**

### Applicable tube material

FEP • PFA • Nylon • Soft nylon  
Polyurethane • Polyolefin

### Electroless nickel plated (Brass parts)

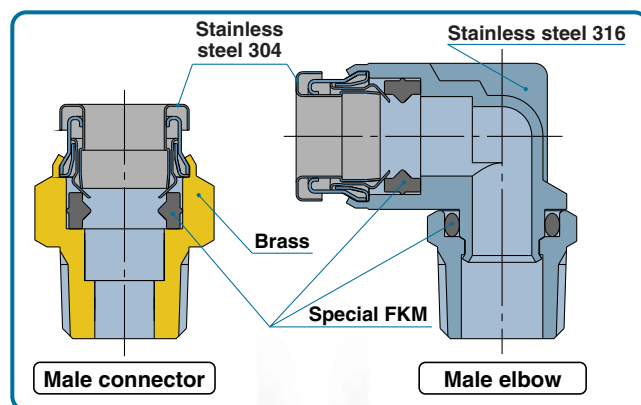

**Stainless steel 304**

