


Setting Standards for Screw Thread Micrometers

Setting Standards Metric (unified) 60°

Used for accurately setting screw thread micrometers at the start or end of the measuring range.

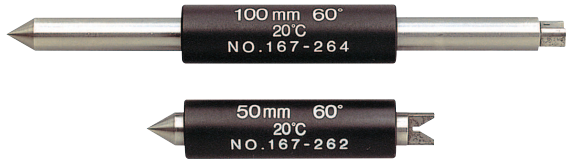

Metric			Angle 60°
No.	Length (L)	Accuracy	
167-261	25 mm	±4 μm	
167-262	50 mm	±5 μm	
167-263	75 mm	±6 μm	
167-264	100 mm	±7 μm	
167-265	125 mm	±8 μm	
167-266	150 mm	±9 μm	
167-267	175 mm	±10 μm	
167-268	200 mm	±11 μm	
167-269	225 mm	±12 μm	
167-270	250 mm	±13 μm	
167-271	275 mm	±14 μm	

Setting Standards Metric Whitworth 55°


Used for accurately setting screw thread micrometers at the start or end of the measuring range.

Metric			Angle 55°
No.	Length (L)	Accuracy	
167-272	25 mm	±4 μm	
167-273	50 mm	±5 μm	
167-274	75 mm	±6 μm	
167-275	100 mm	±7 μm	
167-276	125 mm	±8 μm	
167-277	150 mm	±9 μm	
167-278	175 mm	±10 μm	
167-279	200 mm	±11 μm	
167-280	225 mm	±12 μm	
167-281	250 mm	±13 μm	
167-282	275 mm	±14 μm	

Setting Standards for V-Anvil Micrometers

Series 167

Used for accurately setting V-anvil micrometers



167-329

Metric		
No.	Length (L)	Accuracy
167-327	5 mm	±2 μm
167-328	10 mm	±2 μm
167-329	25 mm	±2 μm
167-330	40 mm	±3 μm
167-331	55 mm	±3 μm
167-332	70 mm	±3 μm
167-333	85 mm	±3 μm