


## Technical data

### UCF.328

Bearing units

grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

## Visual(s)

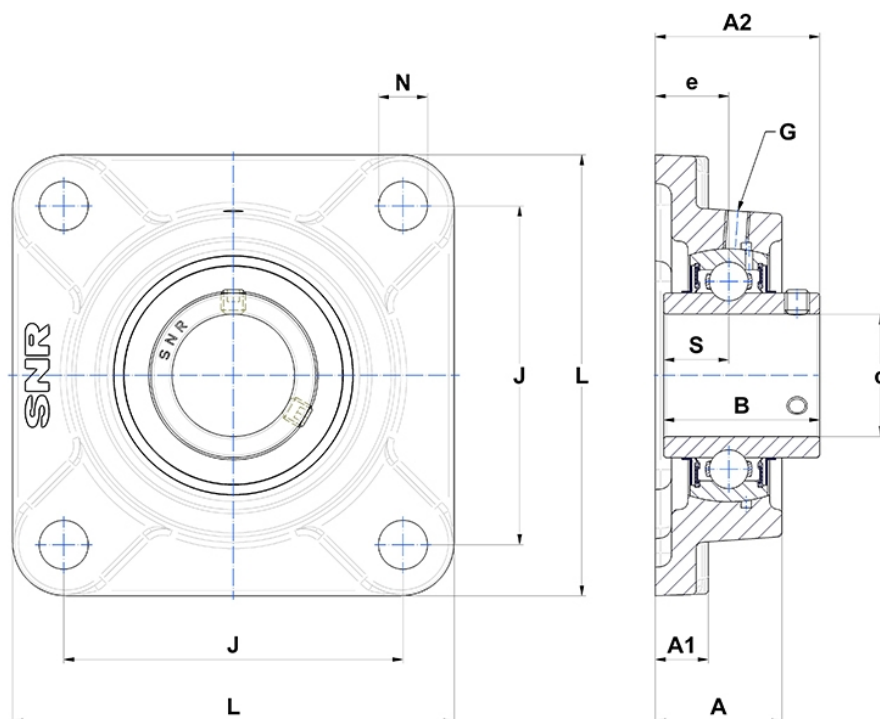

## Product definition

|           |         |
|-----------|---------|
| <b>B</b>  | 145 mm  |
| <b>A</b>  | 125 mm  |
| <b>A1</b> | 55 mm   |
| <b>A2</b> | 161 mm  |
| <b>d</b>  | 140 mm  |
| <b>e</b>  | 75 mm   |
| <b>G</b>  | M10x1   |
| <b>J</b>  | 350 mm  |
| <b>L</b>  | 450 mm  |
| <b>N</b>  | 41mm    |
| <b>s1</b> | 72.5 mm |
| <b>S</b>  | 59 mm   |

## Product performance

|               |        |
|---------------|--------|
| <b>C</b>      | 275 kN |
| <b>C0</b>     | 272 kN |
| <b>T min.</b> | -20 °C |
| <b>T max.</b> | 100 °C |

## Other features

|                                                    |         |
|----------------------------------------------------|---------|
| <b>Weight</b>                                      | 84.7 kg |
| <b>Recommended tightening torque for set screw</b> | 120 Nm  |
| <b>Designation of housing</b>                      | F328-   |
| <b>Designation of bearing</b>                      | UC328G2 |