



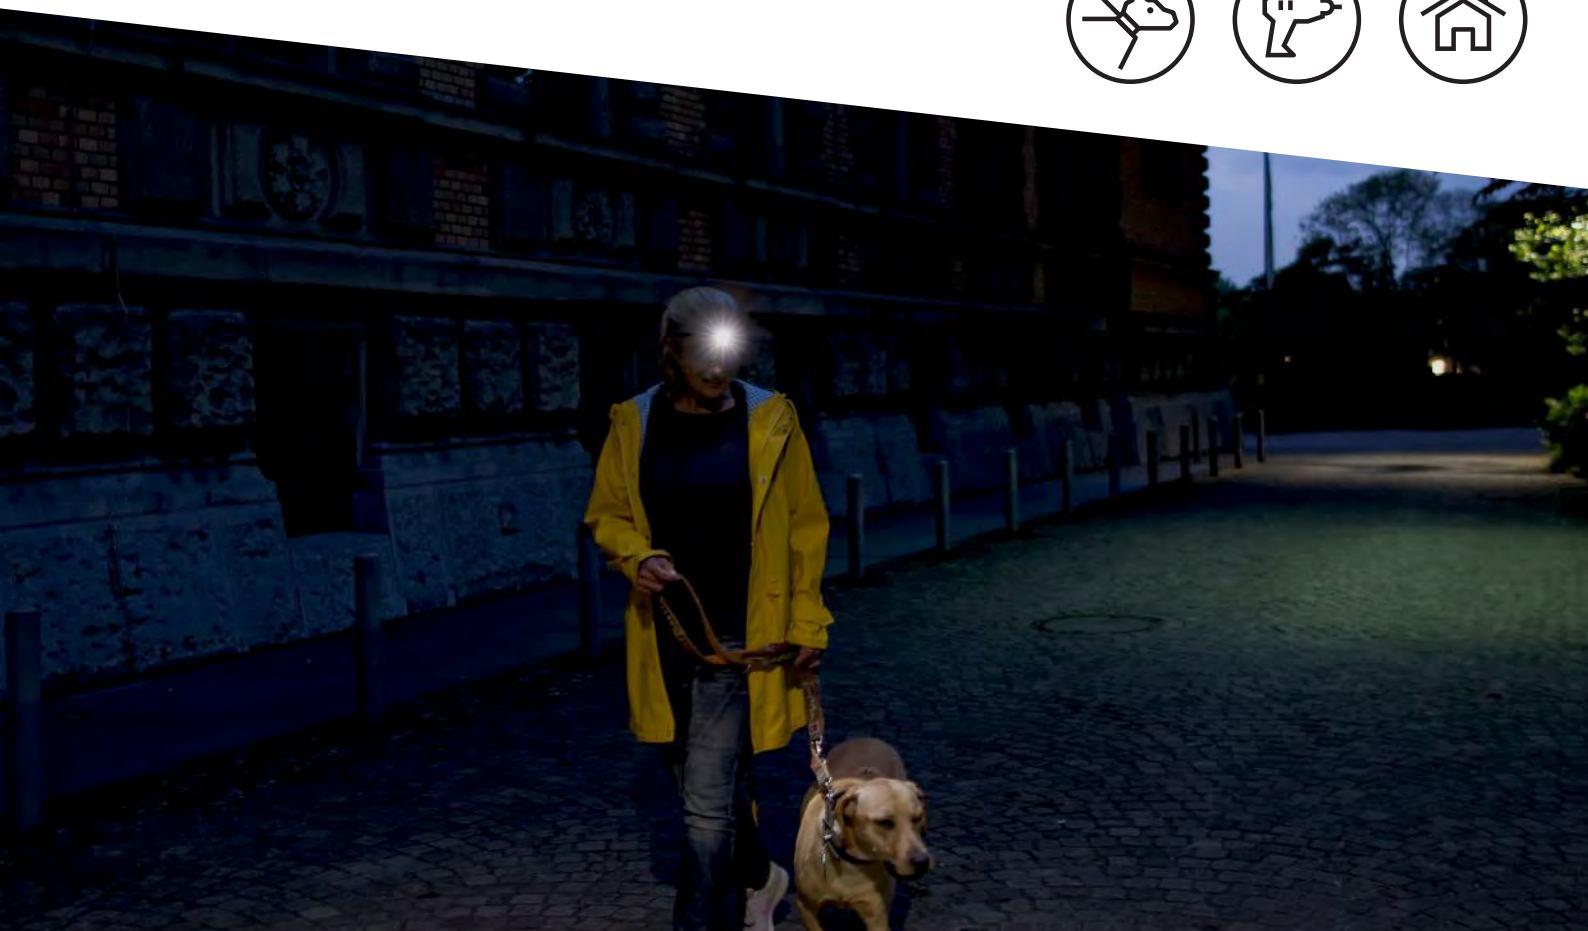

*With registration.
More information at
www.ledlenser.com

PRODUCT DATA SHEET

H19R CORE Rechargeable LED Headlamp (CS3500)



H19R Core

- The Ledlenser H19R CORE rechargeable headlamp provides extreme illumination, a state-of-the-art multi-core optic, four brightness levels, the ability to focus the light beam up to an impressive 300 meters and a host of other features. It is also dust and watertight to IP68 rating
- 7-year with registration warranty - for complete peace of mind
- Four brightness levels - Boost 3500lm, Power 1600lm, Mid Power 800lm, Low Power 200lm
- Fusion Beam Technology - two individually controlled light beams that can be used together or independently; one for flood (distance) and the other for spot (near) illumination, which when used together combine in a unique single light delivery to maximizes light utilization
- Directable light - ability to angle the light beam up or down (within 95°) for maximum illumination flexibility
- Dimming feature - dim the light intensity to provide just the right level of illumination.
- Flicker-free light - prevents a strobe effect, for example on fast moving machinery
- Additional red light - helps to preserve night vision and aids map reading
- Excellent level of ingress protection. 100% dust tight. Watertight against the effects of immersion in water for up to 1 meter / 30 mins. Rated IP68. Ideal for working in dusty or wet environments
- Cooling Technology - helps the unit from overheating and thus prolongs the life of the unit by preventing damage to the light and its components
- Overhead headband for extra stability. Can be detached if not required
- Anti-microbial headstrap material - helps inhibit the growth of harmful microorganism. Additionally, the adjustable headstrap can be detached for washing.
- Low Battery warning - allows user time to replace batteries before power runs out
- Battery status indicator - indicates how much charge is still left in the battery
- Charging indicator - indicates when battery is fully charged during recharging
- Transport Lock mode - prevents accidental battery drain if switch is inadvertently depressed whilst in transit
- Magnetic Charge System - water and dust tight, fuss-free magnetic contact charging. No need to remove battery out of its housing
- Fast charging via supplied magnetic contact charging cable - just 5.5 hours to full charge
- Features a one-fits-all connector that allows attachment to various optional accessories.
- Optional extension lead accessory (code 502312) available - reduces the weight on the head as it enables the battery box to be positioned elsewhere. i.e. pocket, backpack, etc.
- Supplied with 2 x Li-ion 21700 rechargeable battery pack and magnetic contact charging cable

TECHNICAL DATA

Head diameter [mm]	68
Weight incl. batteries [g]	374
Weight without batteries [g]	224
Focus function	No
Head material	PC
Tube material	Aluminum alloy
Optic	Plastic lense (PMMA)
Headband material	Elastic fabric
Headband type	Side overhead headband
Head movement type	Stepless movement
Head movement angle [°]	95
Headband specifications	Detachable, Elastic, Washable

POWER SUPPLY

Power source type	Rechargeable battery
Battery quantity	1
Battery type	Li-ion Battery Pack (2 x 21700)
Battery replaceable	Yes
Total battery voltage [V]	7.4
Total battery capacity [mAh]	4800
Total battery energy ² [Wh]	35.52
Rechargeable	Yes
Charging time ⁵ [min]	330
Energy modes	Constant Light
Energy status indicator	Battery Indicator, Charge Indicator, Low Battery Warning

FURTHER SPECIFICATIONS

IP class	IP68
Drop test (drop height) [m]	1.5
Working temperature range [°C]	-20 to +40

LIGHT FUNCTIONS

Boost, Power, Mid Power, Low Power

LIGHT SOURCE

Amount LEDs	2
LED type	Xtreme LED
Colour	White
Colour temperature [K]	6000 to 7500
Colour rendering index (CRI)	70

LIGHT VALUES

ANSI – Constant Light	Boost	Power	Mid Power	Low Power
Light output ¹ [lm]	3500	1600	800	200
Beam distance ¹ [m]	300	230	150	80
Run time ¹ [h]		4	7	20

SWITCH

Front Switch

FEATURES

Dimmable , Red Light, Transportation lock , Flicker Free, Memory Function, Back-Up Light

TECHNOLOGIES

Cooling Technology, Temperature Control System, Magnetic Charge System, Multi-Core Optics, Fusion Beam

H19R Core

PACKAGING AND LOGISTICS



Exemplary Packaging Illustration

PACKAGING INFORMATION

Type of packaging	Box
Supplied with	1 set of rechargeable batteries, Magnetic charging cable
Item No.	502124
Customs tariff number	85131000
Colour	black

SINGLE PACKAGE

Dimensions W x H x D [cm]	14.5 x 12 x 8.5
Gross weight [g]	587
GTIN-13	4058205020961

EXPORT CARTON

Unit	12
Dimensions W x D x H [cm]	39.5 x 37.5 x 19.5
Gross weight [kg]	7.794
GTIN-13	4058205020985

H19R Core

ACCESSORIES

PRODUCT CATEGORY	ITEM NUMBER	PRODUCT NAME
Fastenings / Brackets	502246	GoPro Adapter Type D
Fastenings / Brackets	502247	Tripod Adapter Type D
Fastenings / Brackets	502253	Belt Clip Type A
Fastenings / Brackets	502313	Helmet Band Fixing Clip Type A
Fastenings / Brackets	502314	Helmet Connecting Kit Type I
Charger / Cable	502312	Extension Cable Type C
Battery	502411	Bluetooth 2x 21700 Batterybox
Battery	502310	2x 21700 Li-Ion Rechargeable Battery Pack
Fastenings / Brackets	502256	Universal Mounting Bracket Type E
Charger / Cable	502265	Magnetic Charging Cable Type A
Fastenings / Brackets	502451	Transparent Silicone Headband Type A
Charger / Cable	502271	USB Adapter 2.4A

H19R Core

FOOTNOTES

The information pertaining to scope of delivery, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change scope of delivery, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and omissions excepted.

1) Measurement values according to ANSI FL1 in the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (lumens/lm) and lighting range (meters/m) on the highest setting, and to battery duration (hours/h) on the lowest setting. A boost function (if available) can be used several times, but only for short periods of time. If the light is equipped with (a) colored LED(s), the measurement values are given for the white light or the white LED. If the light has different energy modes, the measurement is made based on the "energy saving mode".

2) Calculated capacity value in watt-hours (Wh). This applies to the delivery state of the battery/ies inside the respective item, or for lights with rechargeable battery/ies, to the rechargeable battery/ies inside the product when fully charged.

5) Charging time varies by hardware used.