



Technical data

UCFS308


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC308G2, FS308

VISUAL (S)

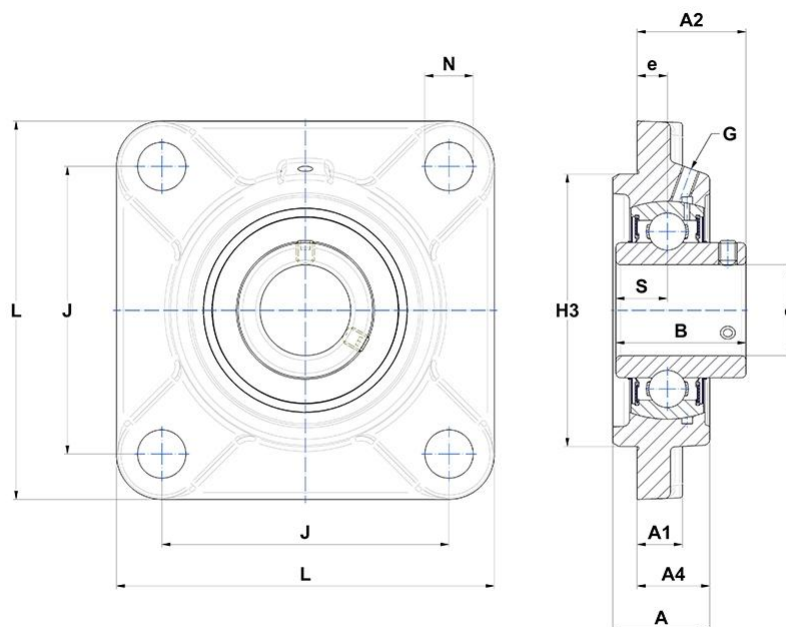

PRODUCT DEFINITION

Brand	SNR
A - Housing height	40 mm
A1 - Housing foot height / flange height	17 mm
A2 - Total height from mounting surface	46 mm
A4 - Housing height from mounting surface	30 mm
B - Width of Inner Ring	52 mm

PRODUCT DEFINITION

d - Shaft diameter	40 mm
e - Distance mounting surface to bearing center	13 mm
G - Grease fitting	M6x1
H3 - Centering dia	115 mm
J - Mounting holes distance	112 mm
L - Housing width / diameter	150 mm
N - Mounting hole dimension	19 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	19 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	40,56 kN
C0 - Static load rating	24 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	3,06 kg
Recommended tightening torque for set screw	22 N-m