


## Technical data

### UCFL.212

Bearing units

grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

## Visual(s)

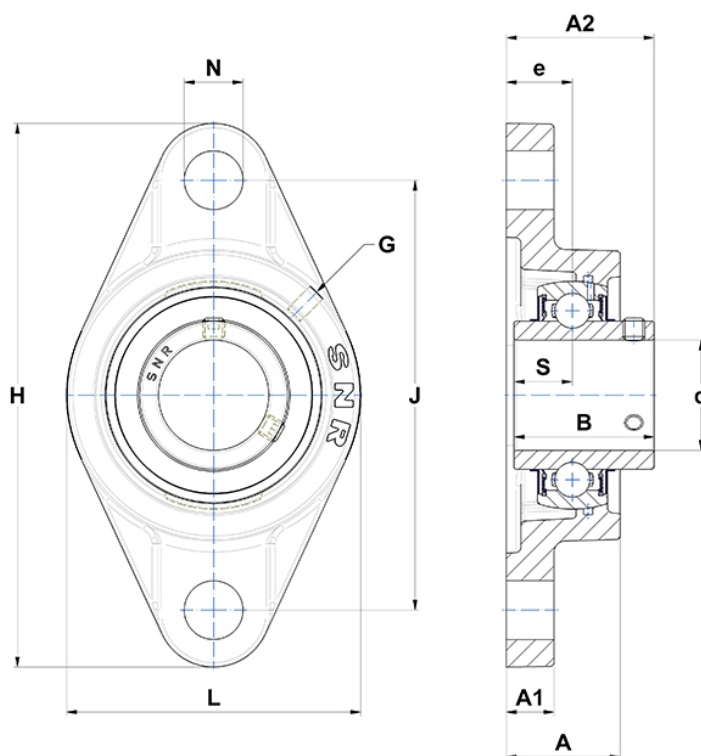

## Product definition

|           |          |
|-----------|----------|
| <b>B</b>  | 65.1 mm  |
| <b>A</b>  | 48 mm    |
| <b>A1</b> | 18 mm    |
| <b>A2</b> | 68.7 mm  |
| <b>d</b>  | 60 mm    |
| <b>e</b>  | 29 mm    |
| <b>G</b>  | M6x1     |
| <b>H</b>  | 250 mm   |
| <b>H</b>  | 250 mm   |
| <b>J</b>  | 202 mm   |
| <b>L</b>  | 140 mm   |
| <b>N</b>  | 23mm     |
| <b>s1</b> | 32.55 mm |
| <b>S</b>  | 25.4 mm  |

## Product performance

|               |         |
|---------------|---------|
| <b>C</b>      | 52.5 kN |
| <b>C0</b>     | 32.8 kN |
| <b>T min.</b> | -20 °C  |
| <b>T max.</b> | 100 °C  |

## Other features

|                                                    |         |
|----------------------------------------------------|---------|
| <b>Weight</b>                                      | 3.83 kg |
| <b>Recommended tightening torque for set screw</b> | 22 Nm   |
| <b>Designation of housing</b>                      | FL212-  |
| <b>Designation of bearing</b>                      | UC212G2 |