


Check-choke valve, Series CC04

- Qn 2►1 = 360-540 l/min
- direction of throttle 2 ► 1
- exhaust air throttling
- push-in fitting / External thread



Working pressure min./max.	0,5 ... 10 bar
Ambient temperature min./max.	-10 ... 70 °C
Medium temperature min./max.	-10 ... 70 °C
Medium	Compressed air

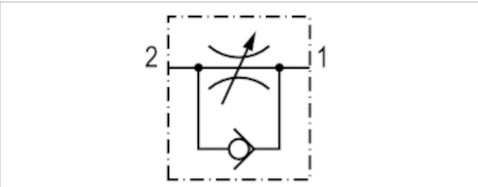

Technical data

Part No.	Port 1	Port 2	Throttle bore	Flow
			Ø	Qn 2►1
0821200192	Ø 4	G 1/8	3 mm	360 l/min
0821200194	Ø 6	G 1/8	3 mm	360 l/min
0821200196	Ø 6	G 1/4	4,5 mm	540 l/min


Nominal flow Qn at 6 bar and Δp = 1 bar

Technical information

Material	
Housing	Polyamide
Flow control screw	Brass
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

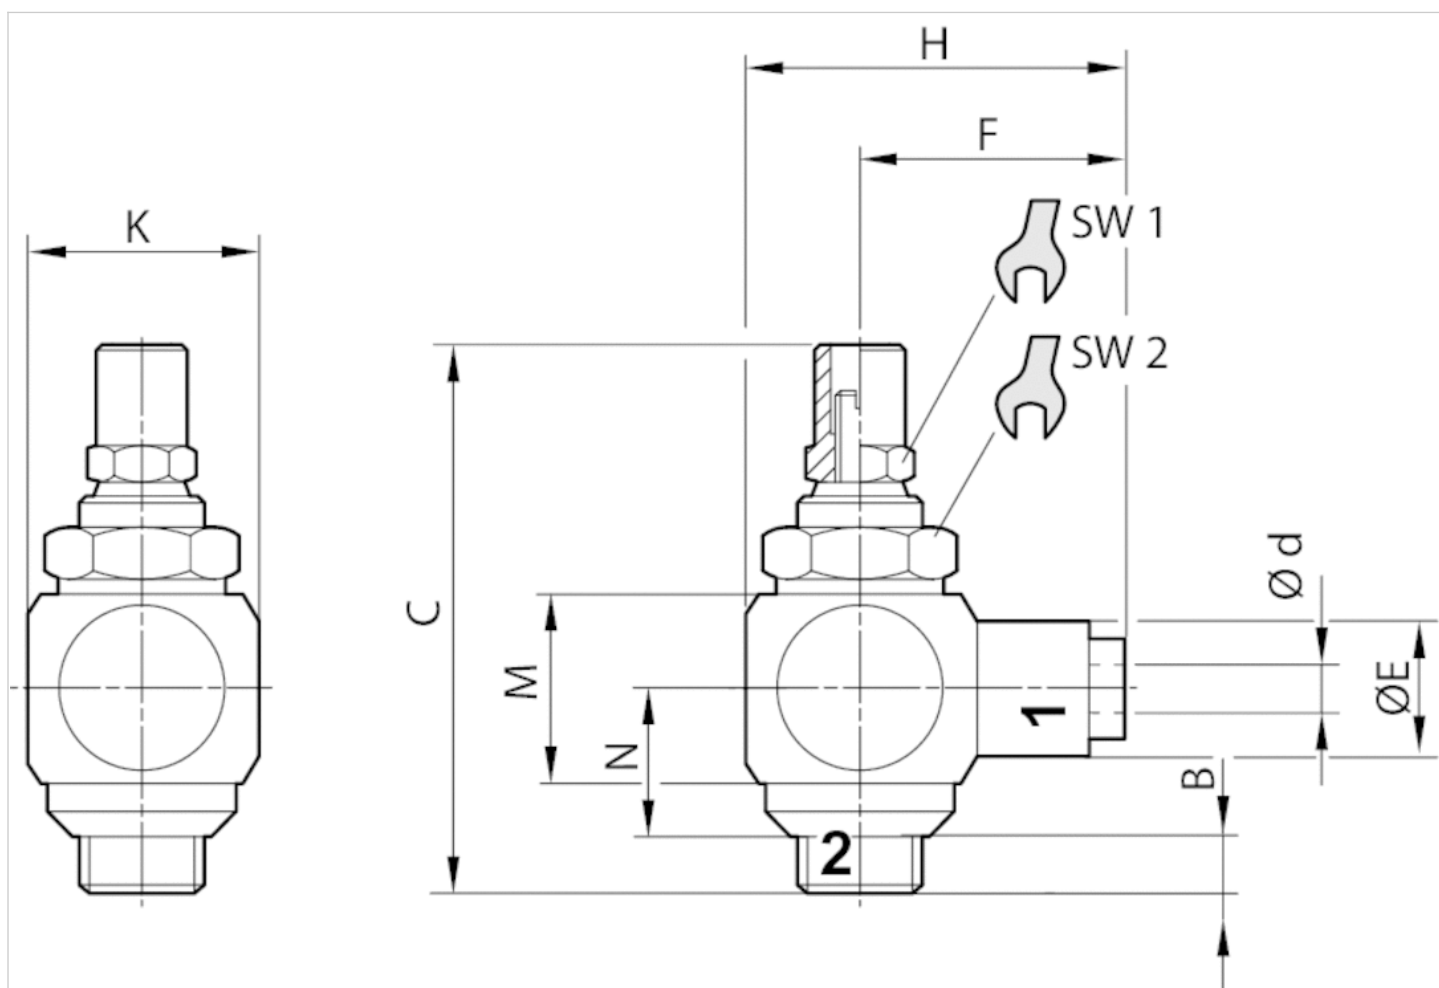

- 1) Valve body with ID mark for inlet throttling
2) Plastic seal

Dimensions

Part No.	Port 1	Port 2	B	C	$\varnothing d$	$\varnothing E$	F	H	K	M	N	SW1	SW2
0821200192	$\varnothing 4$	G 1/8	6.5	45	4	11	23	30.5	10	16	9.5	7	13
0821200194	$\varnothing 6$	G 1/8	6.5	45	6	13	23	30.5	10	16	9.5	7	13
0821200196	$\varnothing 6$	G 1/4	9	51.5	6	13	25.5	35.5	20	16	10.5	10	16