

Radial drilling machine - CRDM 3040x920 Topline ...



Description

Radial drilling machine with mechanical clamping. Auxiliary dial for spindle feed depth indication. The main spindle is balanced by a special spring that makes it more durable than all other balancing mechanisms.

Features

- gear wheels in oil bath
- safety device to prevent arm from falling down abruptly
- precision ground gear wheels
- integrated cooling system
- automatic tool ejector
- gear wheel driven
- 2 speed motor

Documents

[manual-30111-en](#)

[manual-30112-en](#)

	CRDM 3040x920 Topline	CRDM 3040x1100 Topline
	Item no. 30111	Item no. 30112
Drilling capacity	steel 32, iron 50 mm	steel 42, iron 55 mm
Drilling depth	220 mm	230 mm
Tap capacity	steel 25, iron 32	steel 25, iron 38
Speed range	88 - 1500 rpm	44 - 1500 rpm
Table dimensions	600 x 445 x 380 mm	635 x 520 x 415 mm
Max. distance spindle table	1210 mm	1270 mm
Column diameter	210 mm	260 mm
Distance spindle-column	220 - 950 mm	280 - 1100 mm
Number of steps	6	12
Packing dim.	1806 x 826 x 2190 mm	1880 x 864 x 2210 mm
Foot dimensions	1260 x 640 x 160 mm	1725 x 715 x 180 mm
Height	2320 mm	2530 mm
Engine power	1,5 kW	2,2 kW
Weight	1400 kg	1950 kg
Brand	Huvema Machine tools	Huvema Machine tools

General specifications

- ✓ Spindle taper: MT4
- ✓ Voltage: 400 V
- ✓ Power range: 0,05 - 0,09 - 0,15 mm/rev
- ✓ Number of power supplies: 3
- ✓ Coolant pump: 0,2 kW

Accessory optional



Set HSSE Twisted drills, ground, 10 pcs
HB522-MTB2 12991024




Set HSSE Twisted drills, ground, 10 pcs
HB522-MTB3 12991025



Reducing sleeve for MT shanks with tang
MTB 4 ADAPT 3 20112261



Reducing sleeve for MT shanks with tang
MTB 4 ADAPT 2 20112262

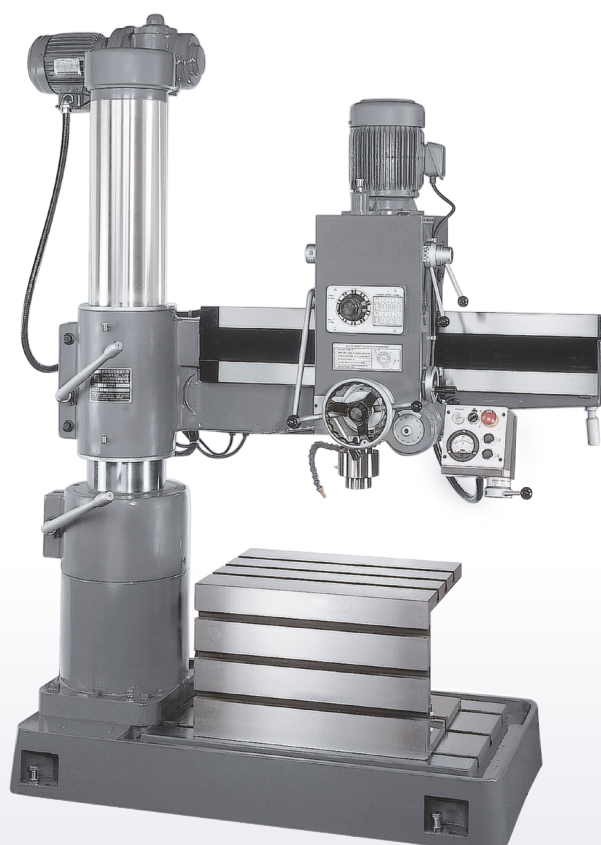

[Website CRDM 3040x920 Topline](#)