




## FEATURES

- CPD certified to EN54 part 11
- Surface or flush
- Activation LED indicator
- Re-useable element
- Clip on cover available
- Unique test/reset/cover removal key
- Weatherproof Available

## SPECIFICATION

- Operating voltage ~ 9 -30V DC
- Fire triggering resistance ~ 470Ω/680Ω
- Element type ~ plastic or glass
- Operating temperature ~ -10°C to +55°C
- ABS flame retardant
- Coloured red
- IP42

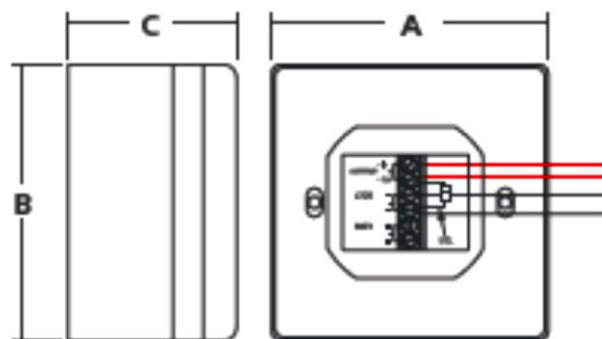

## Universal Call Points

| Order Code   | Description             | Wgt (KG) | Dimensions (mm) |    |    |
|--------------|-------------------------|----------|-----------------|----|----|
|              |                         |          | A               | B  | C  |
| FSUBG        | Universal Call Point    | 0.19     | 87              | 87 | 53 |
| FSRBG/S/IP67 | Weatherproof Call Point | 0.29     | 87              | 87 | 57 |