

## Series NU2

- Straight fitting
- External thread
- M5 G 1/8 G 1/4 G 3/8
- plug-in with tube nut
- Ø 3 Ø 4 Ø 6 Ø 9
- NU2-S-RPN



Working pressure min./max.

-0,95 ... 15 bar

Ambient temperature min./max.

-25 ... 70 °C

Weight per piece

See table below

### Technical data

Part No.	Port G	Port D	Delivery unit	Weight per piece
1823391065	M5	Ø 3	10 piece	0,007 kg
1823391066	M5	Ø 4	10 piece	0,009 kg
1823391067	G 1/8	Ø 3	10 piece	0,012 kg
1823391008	G 1/8	Ø 4	10 piece	0,015 kg
1823391009	G 1/8	Ø 6	10 piece	0,018 kg
1823391010	G 1/4	Ø 4	10 piece	0,022 kg
1823391011	G 1/4	Ø 6	10 piece	0,023 kg
1823391030	G 1/4	Ø 9	10 piece	0,028 kg
1823391031	G 3/8	Ø 6	10 piece	0,027 kg
1823391032	G 3/8	Ø 9	10 piece	0,03 kg

### Technical information

For use up to -40 °C when using with compressed air tubing series TU1-S-PAM Ø4x1, Ø6x1, Ø8x1, Ø10x1, Ø12x1.5

For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

### Technical information


#### Material

Housing

Brass, nickel-plated

Dimensions

Dimensions

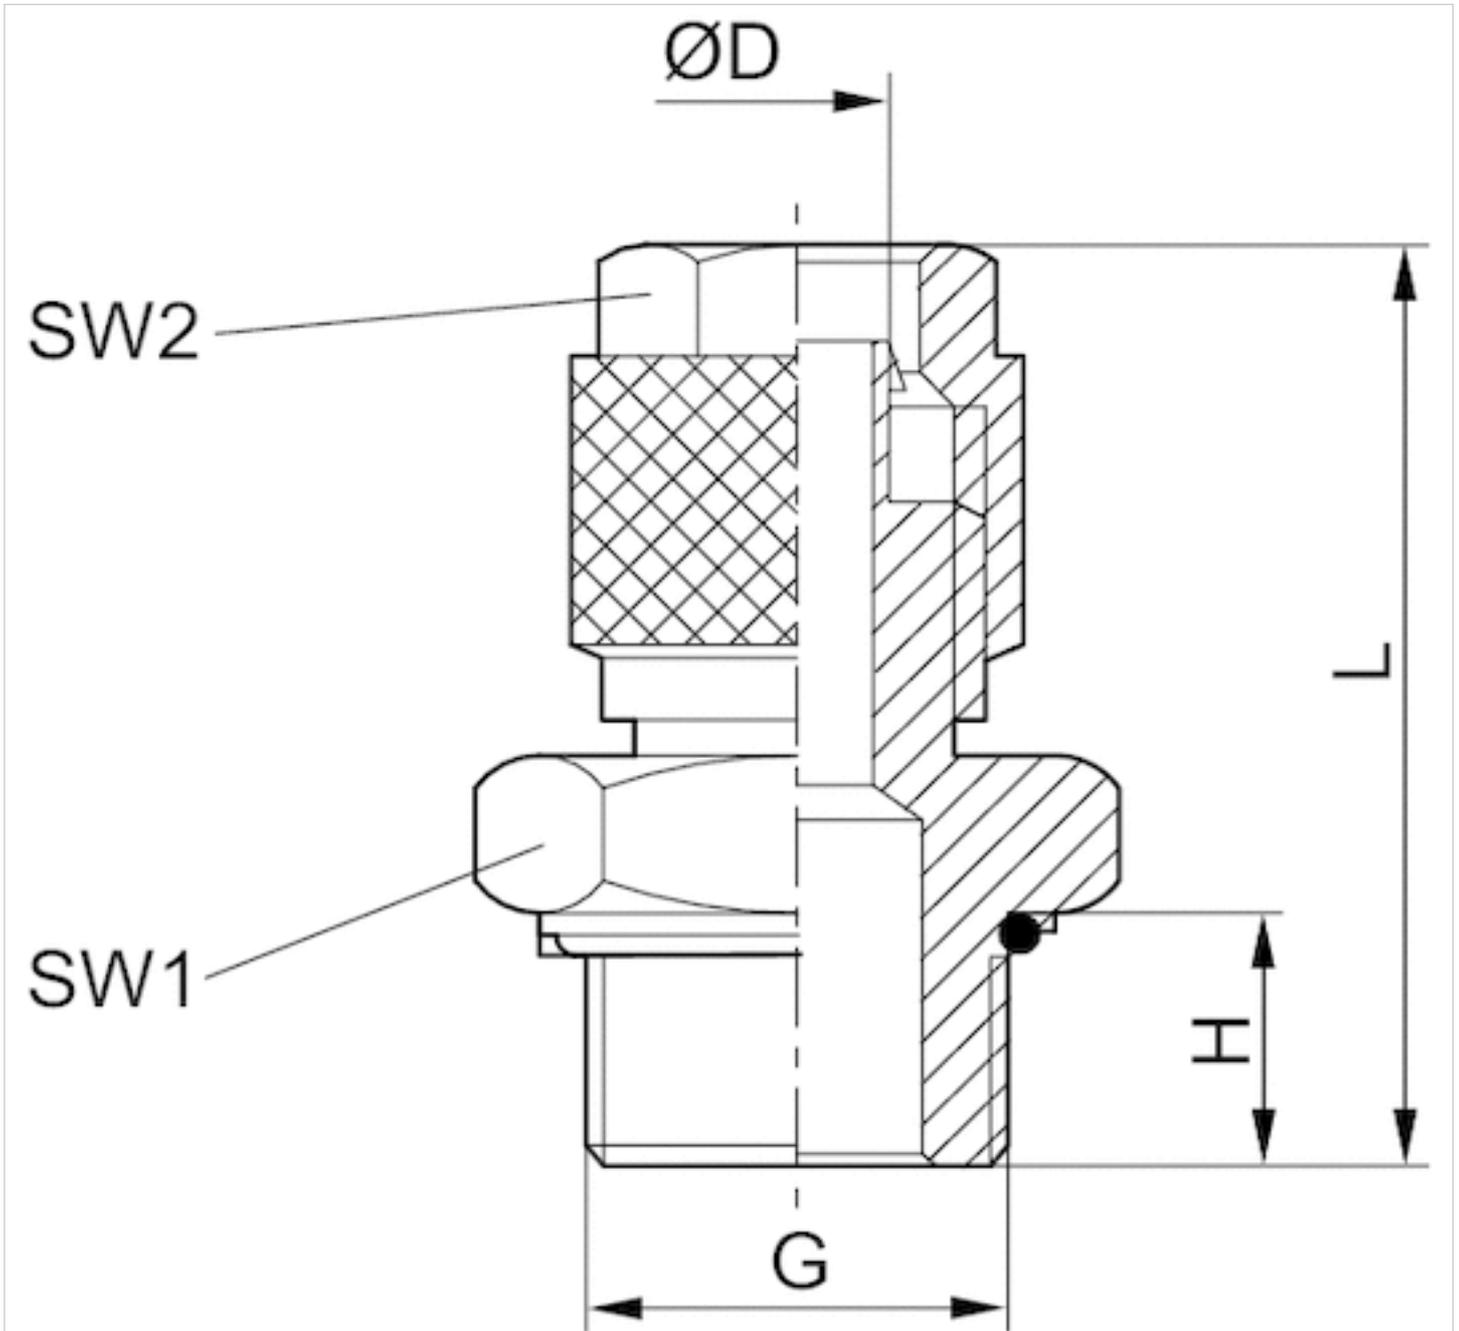

Dimensions

Part No.	Port D	Port G	H	L	SW 1	SW 2
1823391065	$\varnothing 3$	M5	3.5	21	8	9
1823391066	$\varnothing 4$	M5	3.85	20	8	9
1823391067	$\varnothing 3$	G 1/8	4.5	21.7	13	8
1823391008	$\varnothing 4$	G 1/8	5.5	23.5	13	10
1823391009	$\varnothing 6$	G 1/8	4.5	23	14	12
1823391010	$\varnothing 4$	G 1/4	6	25.5	16	10
1823391011	$\varnothing 6$	G 1/4	6	25.5	16	12

Part No.	Port D	Port G	H	L	SW 1	SW 2
1823391030	Ø 9	G 1/4	6	29	17	15
1823391031	Ø 6	G 3/8	7	26.5	19	12
1823391032	Ø 9	G 3/8	9	32.5	19	15

Connection D = inside diameter of the tubing to be used

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR\\_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2021 Emerson Electric Co. All rights reserved.  
2021-08



## CONSIDER IT SOLVED™