




Technical data

32004.A

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Visual(s)

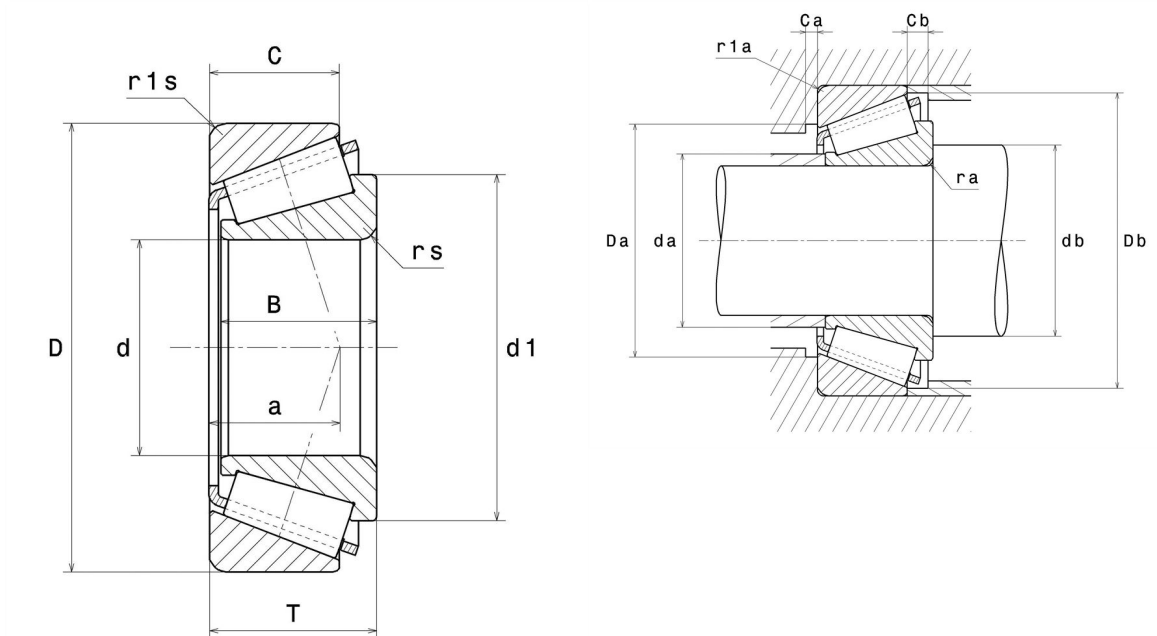

Product definition

d	20 mm
D	42 mm
B	15 mm
C	12 mm
T	15 mm
d1	31.9 mm
a	10.4 mm
rs min	0.6 mm
r1s min	0.6 mm
e	0.37
Y2	1.6
Y0	0.88
Mass	0.1 kg
ISO 355 reference	T3CC020
Brand	SNR

Product performance

Dynamic load, C	25.1 kN
Rating life coefficient, A2	1
Static load, C0	28.3 kN
Fatigue limit load, Cu	3.45 kN
Nref	11,000 Tr/min
Nlim	18,000 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.12 Hz
Characteristic outer ring frequency, BPF0	6.76 Hz
Characteristic inner ring frequency, BPFI	9.24 Hz

Abutment dimensions

da max	25 mm
db min	24.5 mm
Da min	36 mm
Da max	37.5 mm
Db min	39 mm
Ca min	3 mm
Cb min	3 mm
ra max	0.6 mm
r1a max	0.6 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y ₂

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y ₀

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y₂ and Y₀ are shown in the above table