

The Timken Company


4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number UCFL326, UCFL 300 Two-Bolt Flanged Mounted Bearings - Set Screw Locking






<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u>

Specifications -				
	Bearing Number	UC326		
	Shaft Size d	130 mm		
	Locking Style	Set Screw Locking		
	Housing Construction	Two-Bolt Flange		

Dimensions -				
_				
l l	otal Length H	550 mm		
To	otal Height L	360 mm		
Н	lousing Width A	115 mm		
В	Bolt Hole Spacing J	460 mm		
(X)	olt Hole Size N	47 mm		

Flange Thickness A1	50 mm
Center of Bearing from Housing End A2	65 mm
Inner Ring Width B	135 mm
Center of Bearing from Bearing End S	54 mm
Dimension A0	146 mm
Bolt Size	M42

Static Load Rating 214000 N Dynamic Load Rating 229000 N	Bas	ic Load Ratings		-
Dynamic Load Rating 229000 N		Static Load Rating	214000 N	
		Dynamic Load Rating	229000 N	

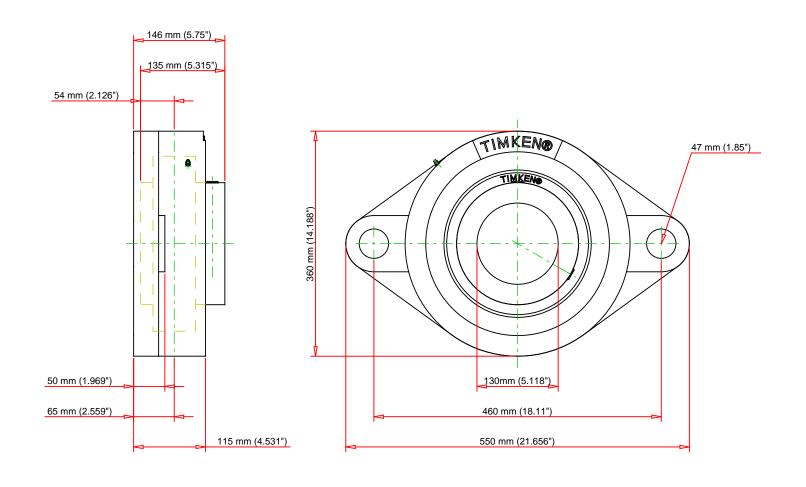

Bearing Number	UC326			
Load Ratings - C _r	51482	lbf	229000	N
Load Ratings - C _{0r}	48110	lbf	214000	N
Weight	135.8	lb	61.6	kg
Bolt Size	M42			



THE TIMKEN COMPANY NORTH CANTON, OHIO USA

UCFL326

UCFL 300 Two-Bolt Flanged Mounted Bearings - Set Screw Locking

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason