




NSB300

**ERGO™ Non-Sparking Slotted
Screwdrivers Copper Beryllium**

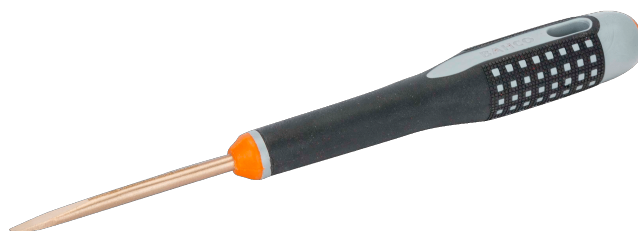

PRODUCT DETAILS

- Made of copper beryllium
- Developed according to the scientific ERGO™ process
- Screwdriver for slotted head screws
- Handle produced using antistatic plastics
- Produced according to ISO 2380
- Non-sparking (NS) tools designed for use in potentially explosive environments, where 'traditional' steel tools may create spark
- Triple-component handle combines strong core with good grip, providing maximum user comfort and force transmission
- Anti-magnetic and highly corrosion resistant



Follow the Fish!



PRODUCT ATTRIBUTES

Product								
NSB300-3-50	0.4 mm	3 mm	50 mm		20 mm	122 mm	175 mm	35 g
NSB300-3-75	0.4 mm	3 mm	75 mm		20 mm	122 mm	200 mm	35 g
NSB300-4-75	0.5 mm	4 mm	75 mm		20 mm	122 mm	200 mm	45 g
NSB300-4.5-50	0.5 mm	4.5 mm	60 mm		20 mm	120 mm	180 mm	43 g
NSB300-4.5-100	0.7 mm	4.5 mm	95 mm		20 mm	120 mm	215 mm	40 g
NSB300-5-75	0.8 mm	5 mm	75 mm		27 mm	120 mm	200 mm	50 g
NSB300-5-100	0.6 mm	5 mm	100 mm		27 mm	122 mm	220 mm	75 g
NSB300-6-100	1.0 mm	6 mm	105 mm		27 mm	120 mm	225 mm	75 g
NSB300-6-125	0.8 mm	6 mm	125 mm		27 mm	122 mm	245 mm	100 g
NSB300-6-150	1.1 mm	6 mm	160 mm		27 mm	120 mm	280 mm	110 g
NSB300-7-150	1 mm	7 mm	150 mm		27 mm	122 mm	270 mm	125 g
NSB300-8-150	1.5 mm	8 mm	150 mm		36 mm	120 mm	270 mm	160 g
NSB300-8-200	1.2 mm	8 mm	200 mm		36 mm	122 mm	320 mm	165 g
NSB300-9-250	1.4 mm	9 mm	250 mm		36 mm	122 mm	370 mm	185 g
NSB300-10-200	2.5 mm	9 mm	200 mm		36 mm	120 mm	320 mm	220 g
NSB300-10-300	2.2 mm	10 mm	318 mm		36 mm	120 mm	440 mm	260 g
NSB300-11-250	2 mm	11 mm	250 mm		36 mm	122 mm	370 mm	260 g
NSB300-11-300	2 mm	11 mm	300 mm		36 mm	122 mm	420 mm	320 g
NSB300-11-350	2 mm	11 mm	350 mm		36 mm	120 mm	470 mm	340 g
NSB300-12-400	3 mm	12 mm	400 mm		36 mm	120 mm	520 mm	380 g
NSB300-13-450	2.5 mm	13 mm	450 mm		36 mm	120 mm	570 mm	410 g

Follow the Fish!



Contact: info@bahco.com / www.bahco.com