



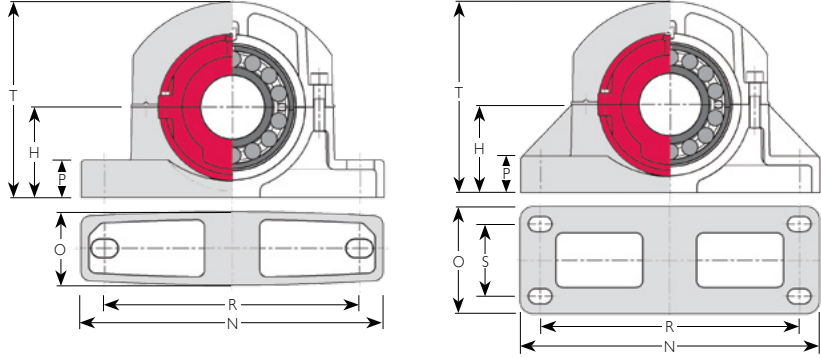

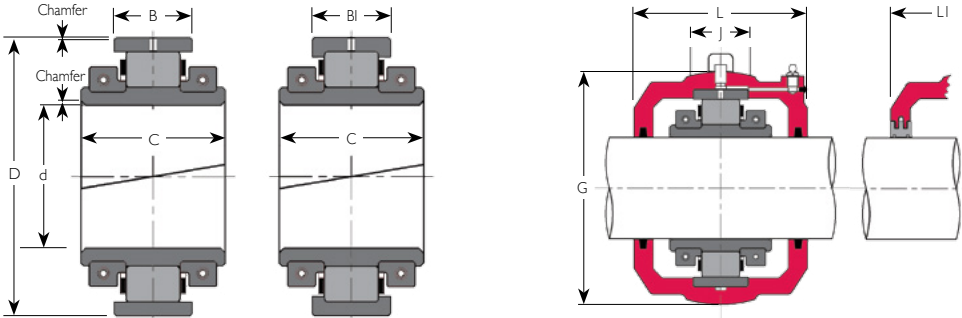

BEARING DATA									CARTRIDGE DATA						
Group Reference	Shaft Diameter d	Reference (I)		D (mm)	C (mm)	B/BI (mm)	Axial Float (2) (mm)	Mass (kg)	Cartridge References (I)		G (mm)	J (mm)	L/LI (mm)	Mass (kg)	
									for felt seals	for ATL seals					
01 108	35	1 3/16"	01 B 103	84.14	50.1	23.8	3.5	1.2	01 C 103	01 C 01	100.00	25	86	2	
	40	1 1/4"	01 B 104						01 C 104						
		1 7/16"	01 B 107						01 C 107						
		1 1/2"	01 B 108						01 C 108						
01E 200	45	1 11/16"	01EB 111	98.42	55.7	25.4	4	1.5	01 C 111	01 C 02	117.48	25	98	2.5	
	50	1 3/4"	01EB 112						01 C 112						
		1 5/16"	01EB 115						01 C 115						
		2"	01EB 200						01 C 200						
01E 208	55	2 3/16"	01EB 203	114.30	55.7	27.0	4.5	1.8	01 C 203	01 C 03	134.94	32	104	3.2	
	60	2 1/4"	01EB 204						01 C 204						
	65	2 7/16"	01EB 207						01 C 207						
		2 1/2"	01EB 208						01 C 208						
01E 300	70	2 11/16"	01EB 211	133.35	61.2	31.8	5	2.5	01 C 211	01 C 04	157.16	38	114	5.5	
	75	2 3/4"	01EB 212						01 C 212						
		2 15/16"	01EB 215						01 C 215						
		3"	01EB 300						01 C 300						
01E 308	80	3 3/16"	01EB 303	152.40	70.7	38.9	6	4.0	01 C 303	01 C 05	177.80	50	136	7	
	85	3 1/4"	01EB 304						01 C 304						
	90	3 7/16"	01EB 307						01 C 307						
		3 1/2"	01EB 308						01 C 308						
01E 400	95	3 11/16"	01EB 311	174.62	81.0	45.3	7	6.0	01 C 311	01 C 06	203.20	50	134	8	
	100	3 3/4"	01EB 312						01 C 312						
	105	3 15/16"	01EB 315						01 C 315						
		4"	01EB 400						01 C 400						
01 408	110	4 3/16"	01 B 403	203.20	84.9	46.9	7	10.2	01 C 403	01 C 07	231.78	64	142	11.9	
	115	4 7/16"	01 B 407						01 C 407						
		4 1/2"	01 B 408						01 C 408						
01 500	120	4 15/16"	01 B 415	222.25	89.7	54.0	7	12.8	01 C 415	01 C 08	266.70	76	156	19.5	
	125	5"	01 B 500						01 C 500						
	130														
01 508	135	5 3/16"	01 B 503	241.30	98.4	55.6	8	15.0	01 C 503	01 C 09	279.40	76	168	20.8	
	140	5 7/16"	01 B 507						01 C 507						
		5 1/2"	01 B 508						01 C 508						
01 600	150	5 15/16"	01 B 515	254.00	98.4	55.6	8	16.6	01 C 515	01 C 10*	295.28	82	174	24.4	
	160	6"	01 B 600-160M						01 C 600						

- 1) Add 'EX' or 'GR' to reference for expansion or fixed type respectively, e.g. Bearing: 01 B 35M EX or 01 B 103 EX
Cartridge: 01 C 35M EX or 01 C 01 EX
- 2) Total movement tabulated. Maximum offset from centreline half this amount

PEDESTAL DATA													Reference	H (mm)	Min. (mm)	Max. (mm)	Ro (mm)	S (mm)	Bolts	N (mm)	O (mm)	P (mm)	T (mm)	Mass (Kg)
P01	60	172	192	-	-	2-off M12 or 1/2"	228	60	22	138	2.5													
P02	70	203	227	-	-	2-off M16 or 5/8"	270	60	25	158	3.2													
P03	80	226	242	-	-	2-off M16 or 5/8"	280	70	32	180	4.9													
P04	95	260	280	-	-	2-off M20 or 3/4"	330	76	38	208	6.9													
P05	112	312	328	-	-	2-off M24 or 7/8"	380	90	44	252	13.3													
P06	125	342	366	-	-	2-off M24 or 7/8"	420	102	52	272	14.7													
P07	143	374	410	-	-	2-off M24 or 7/8"	466	120	60	314	20.6													
P08	162	438	462	-	120	4-off M24 or 7/8"	508	178	38	372	43.3													
P09	181	470	494	-	120	4-off M24 or 7/8"	558	178	41	405	52													
P10	181	484	508	-	120	4-off M24 or 7/8"	558	178	41	415	54													

* Add 'OTL' to reference for cartridge for ATL seals if the cartridge for felt seals with the same bore size is also marked*, eg 01 C 10 OTL.