



Technical data

UCFLE211


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC211G2, FLE211

VISUAL (S)

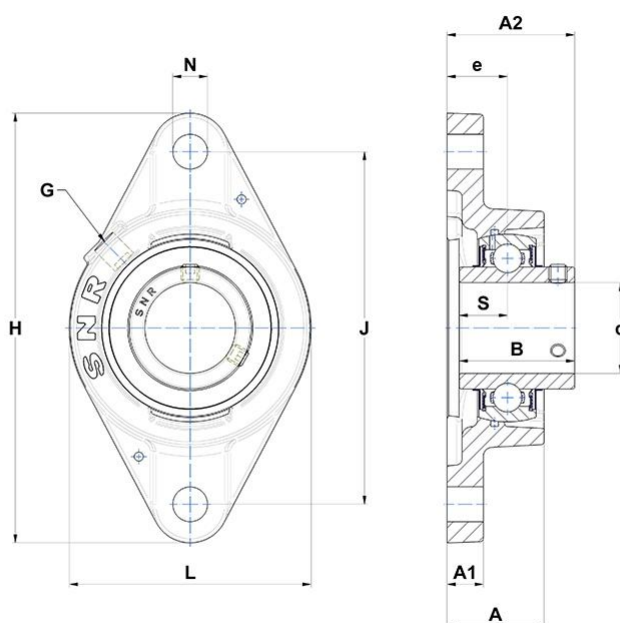

PRODUCT DEFINITION

Brand	SNR
A - Housing height	45,8 mm
A1 - Housing foot height / flange height	15 mm
A2 - Total height from mounting surface	64,4 mm
B - Width of Inner Ring	55,6 mm
d - Shaft diameter	55 mm

PRODUCT DEFINITION

e - Distance mounting surface to bearing center	31 mm
G - Grease fitting	R1/8"
H - Housing length, width or diameter	222 mm
J - Mounting holes distance	184 mm
L - Housing width / diameter	134 mm
N - Mounting hole dimension	18 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	22,2 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	43,55 kN
C0 - Static load rating	29,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	3,22 kg
Recommended tightening torque for set screw	22 N-m