

Technical Data Sheet:	DS068/0512
Product Description	FPYE Contractor Pack: 10 metres of lightweight nylon flexible Conduit with 10x nylon flexilok fittings and locknuts
Product Range	FPYE - Flexible Conduit Contractor Pack

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham
B46 1HG
Tel: 00 44 (0)1675 466900
Website: www.flexicon.uk.com




Size	Part No.
20mm	FPYE-CP20B
25mm	FPYE-CP25B

FPYE Contractor Pack

- 10 Metres of FPAL lightweight nylon PA6 flexible conduit
- 10 Nylon PA66 Flexilok fittings
- 10 Nylon locknuts



FPAL Conduit with FLK fitting

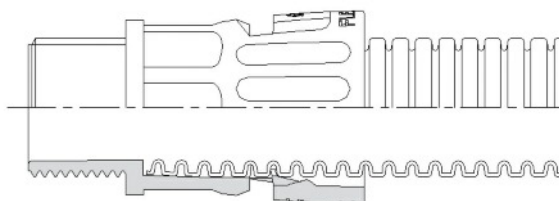


Conduit



Size	OD (mm)	ID (mm)	Min Bend radius R (mm)
20	20.0	15.0	40
25	25.0	19.3	45



Fitting

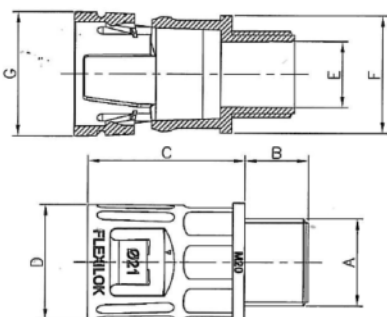

Size (mm)	Thread	Nominal Dimensions (mm)					
	A	B	C	D	E	F	G
20	M20 X 1.5	14	34	25	14.5	25	28
25	M25 X 1.5	15	37	30	19.0	30	33

Material:

Conduit:
Nylon PA6

Fittings:
Nylon PA66

Colour:
Black

Fire Performance:

Self extinguishing

Halogen Free

IP Rating:

- IP66

Applications

• Ideal for use in both internal and external applications FPAL conduit provides excellent resistance to abrasion, oil and solvents.

• Machines where lower mechanical protection is required and buildings where fire risk is not a major consideration.

• Fast fit

• Supplied with 10x Locknuts

Temperature Performance:

-40°C to +120°C

Compliance, Approvals & Accreditation;



IEC EN 61386

EN 61386 Classification Available on request

Typical Applications;



Machinery and OEM's



Construction

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg - Marketing Manager	Approved by; Ian Gibson - Technical Director	Date; May 2012	Page Number; Page 1 of 1
--	--	--------------------------	------------------------------------