



## Single sub-base side outlets (VDMA 24345)

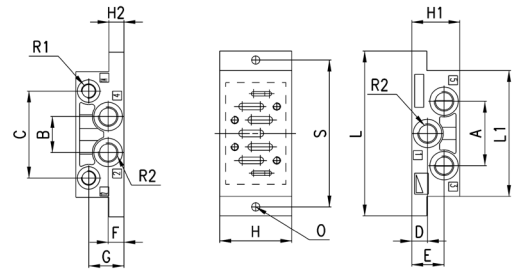

| DIMENSIONS |      |    |    |    |      |      |      |      |    |    |    |     |     |     |      |      |     |
|------------|------|----|----|----|------|------|------|------|----|----|----|-----|-----|-----|------|------|-----|
| Mod.       | Size | A  | B  | C  | D    | E    | F    | G    | H  | H1 | H2 | L   | L1  | O   | R1   | R2   | S   |
| 901-F1A    | 1    | 43 | 24 | 58 | 10.5 | 21.5 | 10.5 | 23.5 | 48 | 32 | 10 | 110 | 84  | 5.5 | G1/8 | G1/4 | 98  |
| 902-F2A    | 2    | 56 | 30 | 74 | 14   | 26   | 14   | 30   | 57 | 40 | 13 | 124 | 95  | 6.5 | G1/8 | G3/8 | 112 |
| 903-F3A    | 3    | 68 | 32 | 90 | 17   | 17   | 17   | 22   | 71 | 32 | 18 | 149 | 119 | 6.5 | G1/8 | G1/2 | 136 |

## Single sub-base with rear outlets (VDMA 24345)

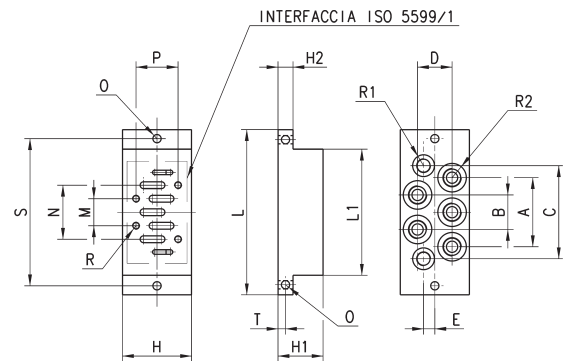


| DIMENSIONS |      |    |    |    |    |     |    |    |    |     |     |    |    |     |    |    |      |      |     |     |
|------------|------|----|----|----|----|-----|----|----|----|-----|-----|----|----|-----|----|----|------|------|-----|-----|
| Mod.       | Size | A  | B  | C  | D  | E   | H  | H1 | H2 | L   | L1  | M  | N  | O   | P  | R  | R1   | R2   | S   | T   |
| 901-G1A    | 1    | 46 | 23 | 61 | 23 | 7.5 | 46 | 30 | 10 | 110 | 84  | 18 | 36 | 5.5 | 28 | M5 | G1/8 | G1/4 | 98  | 5   |
| 902-G2A    | 2    | 56 | 28 | 72 | 28 | 8   | 56 | 35 | 13 | 124 | 95  | 24 | 48 | 6.5 | 38 | M6 | G1/8 | G3/8 | 112 | 6.5 |
| 903-G3A    | 3    | 68 | 34 | 90 | 34 | 10  | 71 | 32 | 18 | 149 | 119 | 32 | 64 | 6.5 | 48 | M8 | G1/8 | G1/2 | 136 | 9   |

## Manifold sub-base with com. exhausts and inlet (VDMA 24345)



The following is supplied:  
2x fixing screws  
3x O-ring

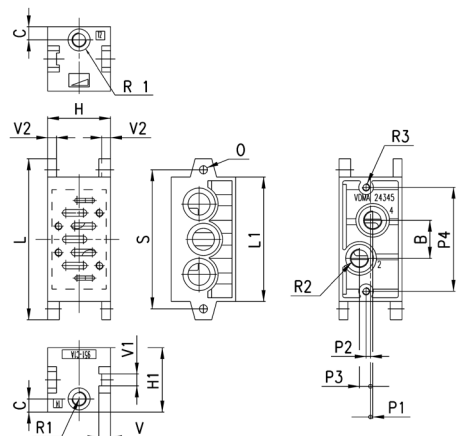

| DIMENSIONS |      |    |     |    |    |     |     |     |     |    |     |     |      |      |    |     |    |    |    |
|------------|------|----|-----|----|----|-----|-----|-----|-----|----|-----|-----|------|------|----|-----|----|----|----|
| Mod.       | Size | B  | C   | H  | H1 | L   | L1  | O   | P1  | P2 | P3  | P4  | R1   | R2   | R3 | S   | V  | V1 | V2 |
| 901-C1A    | 1    | 26 | 8.5 | 43 | 44 | 110 | 85  | 5.5 | 1.5 | 3  | 7.5 | 71  | G1/8 | G1/4 | M5 | 95  | 8  | 8  | 6  |
| 902-C2A    | 2    | 30 | 9   | 56 | 45 | 135 | 100 | 6.5 | 5   | 3  | 6   | 86  | G1/8 | G3/8 | M6 | 115 | 11 | 11 | 8  |
| 903-C3A    | 3    | 38 | 10  | 71 | 54 | 190 | 140 | 9   | 6   | 3  | 8   | 130 | G1/8 | G1/2 | M8 | 168 | 13 | 13 | 8  |

Note: complete with fixing screws  
and O-ring.