


Configurator

Fittings for main line connection		
Description	ø main line [mm]	Code
Straight adapter	6	B
DIN 3862 with flat washer ¹⁾	8	C
	10	D
Banjo fitting DIN 3862 with flat washer, lockable ^{1) 2)}	6	F
Screw plug with flat washer	—	H
Straight adapter with EO-2 functional nut	6	M
	8	N
	10	P
Straight adapter with SKF quick connector	6	T
	8	U
Banjo fitting with SKF quick connectors , not lockable	6	V
Vent plug with profile sealing ring	—	Y
Without fitting; for solderless pipe connection ¹⁾	6	Z

¹⁾ Solderless pipe connection according to DIN 3862 (operating pressure max. 45 bar)
²⁾ Banjo bolt only inserted in delivery condition, not tightened

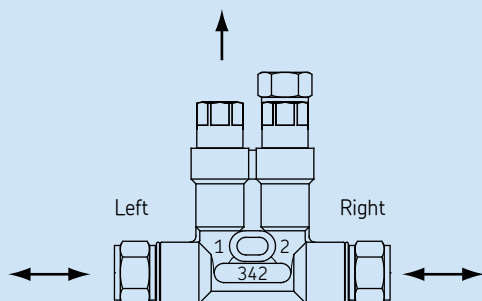

- Two-port single-line distributor for oil
- NBR design
- Lubrication point line connection per DIN 3862 for pipe $\varnothing$ 4 mm,
- Metered quantity for port 1 = 0,03 cm³
- Metered quantity for port 2 = 0,03 cm³, closed
- Main line fitting left and right = straight adapter (DIN 3862) with flat washer for pipe $\varnothing$ 6 mm