

## Socket sets and sockets

10  
3/8"

DIN  
3120

ISO  
1174-1

### 45CL Clip strips


- for socket retention
- supplied without sockets



Code	size	L mm	ΔΔ g
<b>80450001</b>	<b>1</b>	200	40
<b>80450002</b>	<b>2</b>	300	58

## Drive tools and accessories

- 3/8" □
- finish: Chrome Alloy Steel, chrome plated

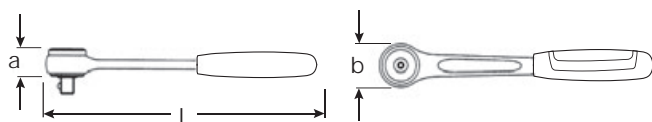

### 422 Ratchet, fine tooth

- reversible
- 60 teeth
- with 2-component handle
- for use in confined spaces, re-engages after movement of 6°
- DIN 3122/ISO 3315



Code	L mm	b mm	a mm	ΔΔ g	☐
<b>12231011</b>	194	32	24	236	1

### 435 Ratchet

- reversible
- 30 teeth
- with 2-component handle
- DIN 3122/ISO 3315



Code	L mm	b mm	a mm	ΔΔ g	☐
<b>12111010</b>	193	29	18	235	5

### 435QR QuickRelease ratchet

- QR
- reversible
- 30 teeth
- with QuickRelease safety lock
- with 2-component handle
- DIN 3122/ISO 3315



Code	L mm	b mm	a mm	ΔΔ g	☐
<b>12110020</b>	193	29	18	244	1

### 435QR N QuickRelease ratchet, fine tooth

- QR FCD 80 4.5°
- reversible
- 80 teeth
- with QuickRelease safety lock
- with 2-component handle
- for use in confined spaces, re-engages after movement of 4.5°
- construction without screws prevents foreign object damage
- DIN 3122/ISO 3315
- registered design



Code	L mm	b mm	a mm	ΔΔ g	☐
<b>12111020</b>	193	30	15	235	1

### 435SG-QR N QuickRelease ratchet, fine tooth

- QR FCD 80 4.5°
- reversible
- 80 teeth
- with QuickRelease safety lock
- with steel handle
- for use in confined spaces, re-engages after movement of 4.5°
- construction without screws prevents foreign object damage
- DIN 3122/ISO 3315
- registered design



Code	L mm	b mm	a mm	ΔΔ g	☐
<b>12111030</b>	193	30	15	272	1

### 452QR QuickRelease fine-tooth flexible-joint ratchet

- QR FCD 80 4.5°
- reversible
- 80 teeth
- with QuickRelease safety lock
- with 2-component handle
- handle may be raised or lowered by approx. 90°, lockable in following positions:
  - straight
  - 30° up
  - 60° up
  - 30° down
- release the lock by pressing the button in the handle
- for use in confined spaces, re-engages after movement of 4.5°
- construction without screws prevents foreign object damage
- DIN 3122/ISO3315
- registered design



Code	L mm	b mm	a mm	ΔΔ g	☐
<b>12261010</b>	300	28.2	14.5	350	1

### 445 Ratchet adaptor

- reversible
- 20 teeth



Code	L mm	∅ mm	ΔΔ g	☐
<b>12140000</b>	43	30	135	1