
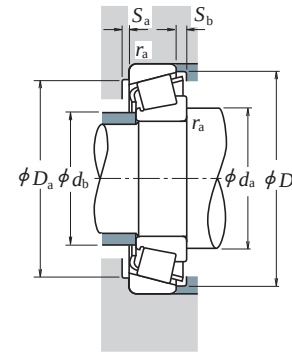


Bore Diameter 85 – 100 mm



Dynamic Equivalent Load

$$P = X F_r + Y F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y_1

Static Equivalent Load

$$P_0 = 0.5 F_r + Y_0 F_a$$

When $F_r > 0.5 F_r + Y_0 F_a$, use $P_0 = F_r$ The values of e , Y_1 , and Y_0 are given in the table below.

Boundary Dimensions (mm)							Basic Load Ratings				Limiting Speeds			
<i>d</i>	<i>D</i>	<i>T</i>	<i>B</i>	<i>C</i>	Cone	Cup	(N)	<i>C</i> _r	<i>C</i> _{0r}	{kgf}	<i>C</i> _r	<i>C</i> _{0r}	(min ⁻¹)	
					<i>r</i> min.								Grease	Oil
85	120	23	23	18	1.5	1.5	93 500	157 000	9 550	16 000	2 800	3 800		
	130	29	29	22	1.5	1.5	143 000	231 000	14 600	23 600	2 600	3 600		
	130	36	36	29.5	1.5	1.5	180 000	305 000	18 400	31 000	2 600	3 600		
	140	41	41	32	2.5	2	230 000	365 000	23 500	37 000	2 400	3 400		
	150	30.5	28	24	2.5	2	184 000	233 000	18 700	23 800	2 400	3 200		
	150	30.5	28	22	2.5	2	171 000	226 000	17 500	23 000	2 200	3 200		
	150	38.5	36	30	2.5	2	210 000	277 000	21 400	28 200	2 200	3 200		
	150	49	49	37	2.5	2	281 000	415 000	28 700	42 500	2 400	3 200		
	180	44.5	41	34	4	3	310 000	375 000	31 500	38 000	2 000	2 800		
	180	44.5	41	28	4	3	261 000	315 000	26 600	32 000	1 900	2 600		
	180	44.5	41	28	4	3	261 000	315 000	26 600	32 000	1 900	2 600		
	180	63.5	60	49	4	3	410 000	535 000	42 000	54 500	2 000	2 800		
90	125	23	23	18	1.5	1.5	97 000	167 000	9 850	17 000	2 600	3 600		
	140	32	32	24	2	1.5	170 000	273 000	17 300	27 800	2 400	3 200		
	140	39	39	32.5	2	1.5	220 000	360 000	22 400	37 000	2 400	3 200		
	150	45	45	35	2.5	2	259 000	405 000	26 500	41 500	2 400	3 200		
	160	32.5	30	26	2.5	2	201 000	256 000	20 500	26 100	2 200	3 000		
	160	42.5	40	34	2.5	2	256 000	350 000	26 100	35 500	2 200	3 000		
	190	46.5	43	36	4	3	345 000	425 000	35 500	43 000	1 900	2 600		
	190	46.5	43	30	4	3	264 000	315 000	26 900	32 000	1 800	2 400		
	190	46.5	43	30	4	3	264 000	315 000	26 900	32 000	1 800	2 400		
	190	67.5	64	53	4	3	450 000	590 000	46 000	60 500	2 000	2 600		
	130	23	23	18	1.5	1.5	98 000	172 000	10 000	17 500	2 400	3 400		
	145	32	32	24	2	1.5	173 000	283 000	17 600	28 900	2 400	3 200		
145	39	39	32.5	2	1.5	231 000	390 000	23 500	39 500	2 400	3 200			
160	46	46	38	3	3	283 000	445 000	28 800	45 500	2 200	3 000			
170	34.5	32	27	3	2.5	223 000	286 000	22 800	29 200	2 200	2 800			
170	45.5	43	37	3	2.5	289 000	400 000	29 500	40 500	2 200	2 800			
200	49.5	45	38	4	3	370 000	455 000	38 000	46 500	1 900	2 600			
200	49.5	45	36	4	3	350 000	435 000	35 500	44 000	1 800	2 400			
200	49.5	45	32	4	3	310 000	375 000	31 500	38 500	1 700	2 400			
200	49.5	45	32	4	3	310 000	375 000	31 500	38 500	1 700	2 400			
200	71.5	67	55	4	3	525 000	710 000	53 500	72 500	1 900	2 600			
100	140	25	25	20	1.5	1.5	117 000	205 000	12 000	20 900	2 200	3 200		
	145	24	22.5	17.5	3	3	113 000	163 000	11 500	16 600	2 200	3 000		
	150	32	32	24	2	1.5	176 000	294 000	17 900	30 000	2 200	3 000		
	150	39	39	32.5	2	1.5	235 000	405 000	24 000	41 500	2 200	3 000		
	165	52	52	40	2.5	2	315 000	515 000	32 500	52 500	2 000	2 800		
	180	37	34	29	3	2.5	255 000	330 000	26 000	34 000	2 000	2 600		
	180	49	46	39	3	2.5	325 000	450 000	33 000	46 000	2 000	2 600		
	180	63	63	48	3	2.5	410 000	635 000	42 000	65 000	2 000	2 600		
	215	51.5	47	39	4	3	425 000	525 000	43 000	53 500	1 700	2 400		
	215	56.5	51	35	4	3	385 000	505 000	39 000	51 500	1 500	2 200		
	215	77.5	73	60	4	3	565 000	755 000	57 500	77 000	1 700	2 400		

Remarks The suffix CA represents medium-angle tapered roller bearings. Since they are designed for specific applications, please consult NSK when using bearings with suffix CA.

Bearing Numbers	ISO355 Dimension Series approx.	Abutment and Fillet Dimensions (mm)									Eff. Load Centers (mm) a	Constant e	Axial Load Factors		Mass (kg) approx.	
		d _a min.	d _b max.	D _a		D _b		S _a min.	S _b min.	Cone r _a max.			Cup r _b max.	Y ₁		Y ₀
				max.	min.	min.	min.									
HR 32917 J	2BC	96	92	111	111	115	5	5	1.5	1.5	20.9	0.33	1.8	1.0	0.8	
HR 32017 XJ	4CC	96	94	121	116	125	6	7	1.5	1.5	28.2	0.44	1.4	0.75	1.38	
HR 33017 J	2CE	96	94	121	117	125	6	6.5	1.5	1.5	26.5	0.29	2.1	1.1	1.75	
HR 33117 J	3DE	100	94	130	122	135	7	9	2	2	32.7	0.41	1.5	0.81	2.51	
HR 30217 J	3EB	100	97	140	133	141	5	6.5	2	2	30.3	0.42	1.4	0.79	2.12	
30217 CA	—	100	98	140	131	142	5	8.5	2	2	36.2	0.58	1.0	0.57	2.07	
HR 32217 J	3EC	100	96	140	131	142	5	8.5	2	2	33.9	0.42	1.4	0.79	2.64	
HR 33217 J	3EE	100	95	140	129	144	7	12	2	2	37.3	0.42	1.4	0.79	3.57	
HR 30317 J	2GB	106	108	166	157	167	5	10.5	3	2.5	35.8	0.35	1.7	0.96	5.08	
HR 30317 DJ	7GB	113	103	166	144	169	6	16.5	3	2.5	55.4	0.83	0.73	0.40	4.88	
HR 31317 J	7GB	113	103	166	144	169	6	16.5	3	2.5	55.4	0.83	0.73	0.40	4.88	
HR 32317 J	2GD	110	104	166	151	167	5	14.5	3	2.5	43.6	0.35	1.7	0.96	7.31	
HR 32918 J	2BC	101	97	116	116	120	5	5	1.5	1.5	22.0	0.34	1.8	0.96	0.838	
HR 32018 XJ	3CC	102	99	131	124	134	6	8	2	1.5	29.7	0.42	1.4	0.78	1.78	
HR 33018 J	2CE	102	99	131	129	135	7	6.5	2	1.5	27.9	0.27	2.2	1.2	2.21	
HR 33118 J	3DE	105	100	140	132	144	7	10	2	2	35.2	0.40	1.5	0.83	3.14	
HR 30218 J	3FB	105	103	150	141	150	5	6.5	2	2	31.7	0.42	1.4	0.79	2.6	
HR 32218 J	3FC	105	102	150	139	152	5	8.5	2	2	36.2	0.42	1.4	0.79	3.41	
HR 30318 J	2GB	111	114	176	176	176	5	10.5	3	2.5	37.3	0.35	1.7	0.96	5.91	
HR 30318 DJ	7GB	118	110	176	152	179	6	16.5	3	2.5	58.7	0.83	0.73	0.40	5.52	
HR 31318 J	7GB	118	110	176	152	179	6	16.5	3	2.5	58.7	0.83	0.73	0.40	5.52	
HR 32318 J	2GD	115	109	176	158	177	5	14.5	3	2.5	46.5	0.35	1.7	0.96	8.6	
HR 32919 J	2BC	106	102	121	121	125	5	5	1.5	1.5	23.2	0.36	1.7	0.92	0.877	
HR 32019 XJ	4CC	107	104	136	131	140	6	8	2	1.5	31.2	0.44	1.4	0.75	1.88	
HR 33019 J	2CE	107	103	136	133	139	7	6.5	2	1.5	28.6	0.28	2.2	1.2	2.3	
T 2 ED095	2ED	113	108	146	141	152	6	8	2.5	2.5	34.5	0.34	1.8	0.97	3.74	
HR 30219 J	3FB	113	110	158	150	159	5	7.5	2.5	2	33.7	0.42	1.4	0.79	3.13	
HR 32219 J	3FC	113	108	158	147	161	5	8.5	2.5	2	39.3	0.42	1.4	0.79	4.22	
HR 30319 J	2GB	116	119	186	172	184	5	11.5	3	2.5	38.6	0.35	1.7	0.96	6.92	
30319 CA	—	116	119	186	168	188	5	13.5	3	2.5	48.6	0.54	1.1	0.61	6.71	
HR 30319 DJ	7GB	123	115	186	158	187	6	17.5	3	2.5	61.9	0.83	0.73	0.40	6.64	
HR 31319 J	7GB	123	115	186	158	187	6	17.5	3	2.5	61.9	0.83	0.73	0.40	6.64	
HR 32319 J	2GD	120	115	186	167	186	5	16.5	3	2.5	48.6	0.35	1.7	0.96	10.4	
HR 32920 J	2CC	111	109	132	132	134	5	5	1.5	1.5	24.2	0.33	1.8	1.0	1.18	
T 4 CB100	4CB	118	108	135	135	142	6	6.5	2.5	2.5	30.1	0.47	1.3	0.70	1.18	
HR 32020 XJ	4CC	112	109	141	136	144	6	8	2	1.5	32.5	0.46	1.3	0.72	1.95	
HR 33020 J	2CE	112	107	141	137	143	7	6.5	2	1.5	29.3	0.29	2.1	1.2	2.38	
HR 33120 J	3EE	115	110	155	144	159	8	12	2	2	40.5	0.41	1.5	0.81	4.32	
HR 30220 J	3FB	118	116	168	158	168	5	8	2.5	2	36.1	0.42	1.4	0.79	3.78	
HR 32220 J	3FC	118	115	168	155	171	5	10	2.5	2	41.5	0.42	1.4	0.79	5.05	
HR 32220 J	3FE	118	113	168	152	172	10	15	2.5	2	46.0	0.40	1.5	0.82	6.76	
HR 30320 J	2GB	121	128	201	185	197	5	12.5	3	2.5	41.4	0.35	1.7	0.96	8.41	
HR 31320 J	7GB	136	125	201	169	202	7	21.5	3	2.5	67.7	0.83	0.73	0.40	9.02	
HR 32320 J	2GD	125	125	201	178	200	5	17.5	3	2.5	53.2	0.35	1.7	0.96	12.7	